





The ultimate in comfort

Designed with the highest quality in mind

Why choose Daikin?

Our promise at Daikin is to combine the best performance with **the greatest energy efficiency** to create the most comfortable environment.

We dedicate ourselves to technological excellence that delivers **outstanding indoor air quality** through a unique filtration process.

Our reliability is second to none, thanks to the **cutting-edge technologies** used in our units and our dedication to service.

With **WLAN connectivity** available on all units, controlling your living or working environment is a breeze.


Multi-connection to 5 ports means that your comfort requirements can always be accommodated.

NEW Connect your multi system to a domestic hot water tank.

Build quality and operational excellence are incorporated into every Daikin unit, using the highest quality standards in the industry, from parts to the manufacturing process.


Daikin's intelligent sensors and airflow techniques are just that: smart and responsive. This delivers the highest level of comfort – it's almost as though the unit is plugged into your brain and knows exactly what you want!

Daikin takes great pride in its **iconic and award-winning designs**, which are created to provide visual beauty in addition to operating quietness and efficiency, tailored to our customers' specific needs.

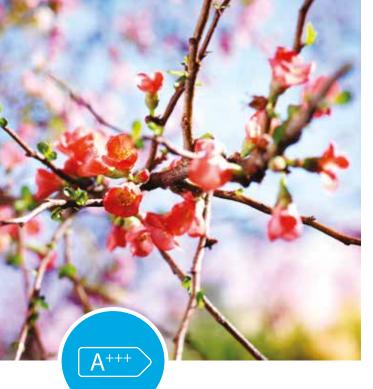




Heat pump principle

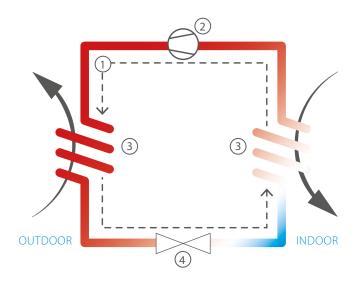



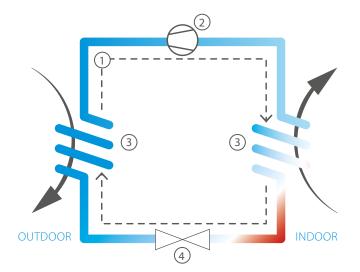

HEATING CYCLE

- ① **REFRIGERANT**: R-32 is the best energy performing refrigerant with low environmental impact, developed and produced by Daikin.
- ② **COMPRESSOR**: Our in-house develop swing compressor provides maximum capacity
- 3 **2 HEAT EXCHANGERS**: The evaporator and condensor are made out of high quality copper tubes, with incisions inside of the tubes to increase the exchange of heat even more.

The aluminium fins on the outdoor unit are precoated, making them resistant for harsh outdoor conditions

4 THE ELECTRONIC EXPANSION VALVE

releases the liquified refrigerant electronically in the evaporator thus exact temperatures can be reached in the evaporator.

This results in:

- > Best comfort
- > Best and reliable energy efficiencies



Top indoor air quality


through unique filtration

Internal pollution has less obvious consequences on people and manifests the effects in the long run, this causes a lower level of attention.

90% of our time is spent indoors. The indoor air is 2 to 5 times more polluted than outdoor air.

Within our air conditioners, we offer several filtering techniques depending on the range:

	Flash Streamer	Titanium Apatite deodorising filter	Silver Allergen removing filter	Dust Filter	Self Cleaning Air filter
	STREAMER STREAMER	24 H			The state of the s
Ururu Sarara	•	•			•
Stylish	•	•	•	•	
Daikin Emura		•	•	•	
Perfera	•	•	•	•	
Comfora		•	•	•	
Sensira		•		•	

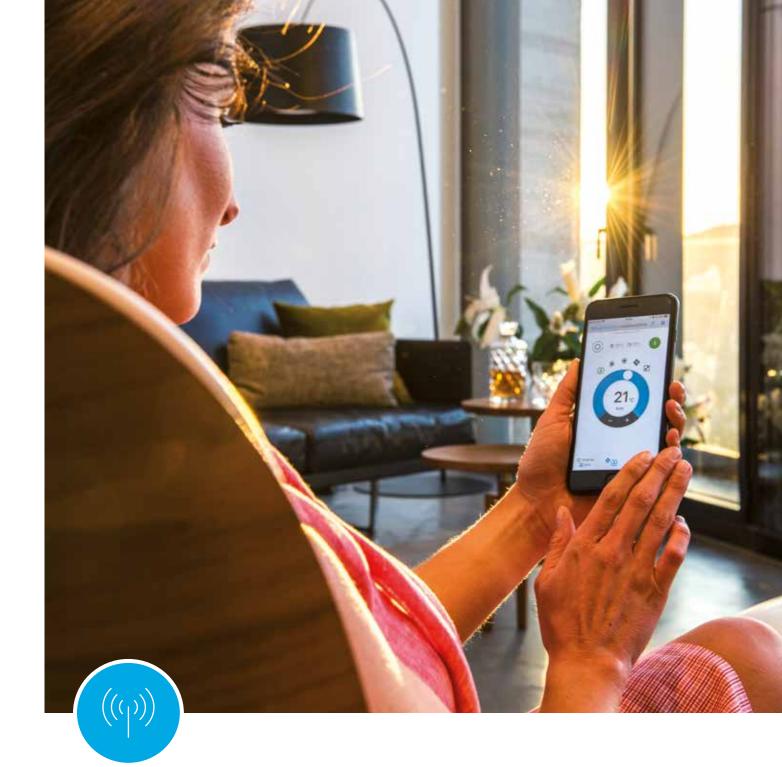

Connectivity

The Onecta app can control and monitor up to 50 split air conditioning units. All Bluevolution units are connectable with the Onecta app.

Control

Control operation mode, temperature, air purification, fan speed & direction



Monitor

Monitor your energy consumption, set holiday schedule



Intuitive online and voice control


Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

Your benefits

- > Access to various features for controlling your internal climate
- > Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- > Create different operating schedules and modes
- > Monitor energy consumption


Schedule


Schedule the set temperature, operation mode and fan speed

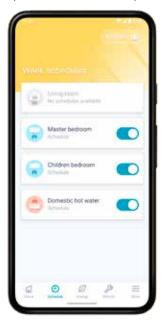

Identify

Identify the rooms of your house

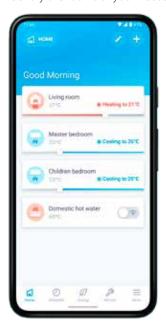

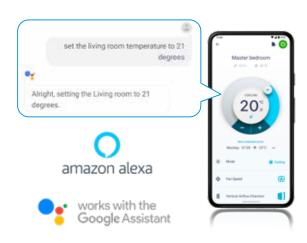



Multi

A Daikin multi split system offers you unexpected possibilities in creating a comfortable and cosy home. This is your solution to reduce limitations like environmental impact and financial aspects.

Choose between 2 options


Multi


for cooling and heating (up to 5 indoor units)

NEW Multi+

for cooling, heating and hot water

Connect Multi+ outdoor unit with up to 3 indoor units and a 90 l or 120 l tank to provide domestic hot water

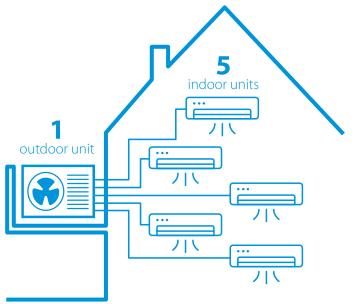

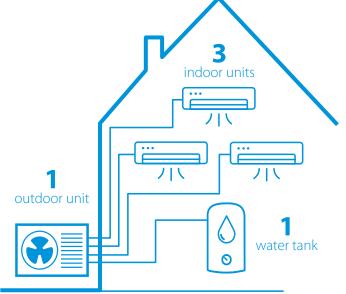

Less mounting space, less visibility, less sound



SAVE SPACE

Drastically reduce the space required for placing a number of units on your facade.



LESS VISIBILITY

Enjoy your nice ambience. Finding just one hiding place is much easier.



LESS NOISE

Only one unit in operation is much quieter than two or more units.

Easier installation, wiring, piping and maintenance



SAVE MOUNTING EQUIPMENT

Wherever you want to place an outdoor unit, for every unit you will need correct mounting equipment for a secure fixing and problem-free operation.



SAVE TIME

The physical installation, wiring, drain piping as well as the initial setup of only one system is much easier and faster.



REDUCED CHANCE OF TECHNICAL ERRORS

When using only one outdoor unit instead of two or more, the statistical probability of a possible technical defect is reduced with every unit that you do not need.

More flexibility: connect up to 5 indoor units of any style

There are many possibilities in comfort you can profit from a multi split solution:



Up to 5 indoor units connectable to **only one outdoor** unit



Every single indoor unit can be **regulated separately**



Choose from a **greater variety** of connectable indoor unit types out of our split and Sky Air series



Use **low capacity** indoor units specially designed for small rooms which can only be connected to a multi split system



Are you planning an additional indoor unit later on? Just **decide now** for an outdoor unit with higher capacity and simply **connect it later**.

Lower power consumption, high efficiency



Our big compressors can work more efficiently than various smaller ones with the same capacity in sum. Also save a significant proportion of energy thanks to standby mode.



Daikin 3D app for end-users

Daikin 3D app is the application that allows you to choose the air conditioning and watch it at home BEFORE you buy it!

With the Daikin 3D app you can **virtually place** an air conditioner in your own interior.

Switch on the device, get close, look from every angle, add dimensions and take a photo so that you can easily compare all the different Daikin options.

















Product detail
Consult the technical data sheets and find additional information



3D visualisation Customize the size, colour, rotate and move the air conditioning to your liking



Best comfort through intelligent sensors and airflow techniques



Low sound

Our indoor units are almost inaudible to hear with sound levels down to 19dBA thanks to high-end airflow techniques and in-house developed fans.



NEW

In addition, a special software is developed on a range of outdoor units* to lower the sound level if required by legislation.

For more information, please contact your local sales office

* RXM20-35R9, RXA20-35A9, RXJ20-35A, 2MXM40-50A, 3MXM40-52A, 2AMXM40-50A



Intelligent thermal sensor

Stylish FTXA uses an intelligent thermal sensor to detect the surface temperature of a room to create a more comfortable climate by directing the airflow that requires cooling or heating.



2-area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. If no people are detected, the unit will automatically switch over to the energy efficient setting.



3-D air flow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.



Fireplace logic

When installed close to a heating device (e.g. fireplace or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house (Applicable for optimised heating FTXTM-R and FTXTA-BW/BB)



Why choose Ururu Sarara?

The Daikin Ururu Sarara brings a new level of sophisticated control to air conditioning. It has five air treatment techniques which together provide a total comfort solution. In addition, the Ururu Sarara range has SEER and SCOP Arraings thanks to its energy efficient compressor and heat exchanger. Because of its innovative technology, as well as its design, it won the prestigious Red Dot design award.







5 air treatment techniques



Heating and cooling in one unit, for year-round comfort with the highest energy label available



In summer, the Sarara function removes excess moisture while maintaining an even temperature thus eliminating the need for extra cooling



In winter, the Ururu function replenishes the moisture in the air to maintain a comfortable feel without unnecessary heating



Ventilation for fresh air even with closed windows


Air purification



Flash streamer

Using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.


FLASH STREAMER





Titanium apatite deodorising filter

Decomposes bothersome odours of for example tobacco and pets.

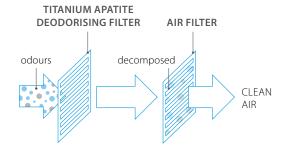



Self-cleaning filter

The air filter removes airborne dust particles from the air while the integrated brush regularly and automatically cleans the filter to ensure a steady supply of clean air.





Why choose Daikin Emura?

- > Ultimate comfort, designed with the highest **quality** in mind ... Its design speaks for itself: Daikin Emura pleases the eye and has a strong focus on comfort and user experience to improve your well-being at home.
- When you choose Daikin technology, you can count on year-round comfort, energy efficiency, reliability and control.

High energy efficiency

Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season. The label includes multiple classifications from A+++ to G. Daikin Emura achieves high energy efficiencies:

- > SEER up to
- > SCOP up to



Benefits



Almost inaudible with sound levels down to 19 dBA



3D airflow



Intelligent thermal sensor



Heat boost



Weekly timer



Onecta app: always in control no matter where you are, including voice control



Connectable to pair, multi and VRV







Unique design

Silver, matt white and matt black, these are the three monochrome colours in which the Daikin Emura air conditioner is available.



The front panel of the remote control matches the colours of the indoor unit – the casing is anthracite grey to create a floating effect.



The outdoor unit comes in ivory white.



Comfort

Intelligent thermal sensor

Daikin Emura uses an intelligent thermal sensor to detect a room's current temperature. After determining the room temperature, the intelligent thermal sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm and cool air to areas that need it.

3D airflow

Combines vertical and horizontal auto-swing to circulate a stream of warm or cool air right to the corners of even large spaces.

Inaudible to hear

Daikin Emura is almost inaudible with sound levels down to 19 dBA.

Coanda effect

By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

Heat boost

Daikin Emura quickly heats the room when starting up, ensuring the set temperature is reached faster.





Stylish where innovation meets creativity



White FTXA-AW



Black FTXA-BE



Silver FTXA-BS



Blackwood FTXA-BT



Available in 4 colours

- > Users can choose from **four distinct colours** (white, silver, black and blackwood)
- > **Curved corners** create an unobtrusive and space-saving design
- > Thin dimensions make it the most compact design unit on the market
- > Simple panel enables variation in texture and colour to easily blend into any room
- > Award winning design: Stylish earned the Reddot award, the Good Design Award and iF award for its innovative look and functional capabilities






The Coanda effect

Already present in the Ururu Sarara, the **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

The Coanda effect creates two different airflow patterns depending on whether Stylish is in cooling or heating mode. On the top is the Coanda effect in cooling mode (ceiling airflow), while the bottom images demonstrate the Coanda effect in heating mode (vertical airflow).
















Air quality

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.



Intelligent thermal sensor

Stylish uses an **intelligent thermal sensor** to detect the surface temperature of a room to create a more comfortable climate. After determining the current room temperature, the grid eye sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.





Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. To achieve higher energy efficiency, Daikin designed a fan that runs efficiently within Stylish's compact dimensions. Together, the fan and heat exchanger attain top energy performance but operate at a sound level that is practically inaudible to occupants.



Onecta app

Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!

Your benefits

- > Access to various features for controlling your internal climate
- > Manage the temperature, operating mode, air purification and fans with the interactive thermostat
- > Create different operating schedules and modes
- > Monitor energy consumption



Perfera wall mounted unit

makes cool living and working a breeze

Whatever the weather's doing outside, inside you want optimum comfort throughout the day. Like a cool summer breeze, Perfera instinctively knows how to keep the room temperature in your living or working space at the ideal level, so that you and those around you can get on with relaxing, enjoying yourselves – and being productive. The stylishly designed front panel, whisper-quiet operation and the perfect circulation of cooled or heated air help make each room the place you – and everyone – always want to be.

Intelligent - Comfortable - Quiet



3-D 3-D Air flow

By pressing the buttons on the remote control, this function combines vertical and horizontal auto-swing to circulate a stream of cool/warm air right to the corners of even large spaces.



Silent operation


Perfera uses a specially designed fan that optimises airflow and creates high energy efficiency at low sound levels. For even higher energy efficiency, Daikin has also designed a new fan that fits snugly into Perfera's compact dimensions.

Together, the fan and heat exchanger produce top energy performance, yet operate at a sound level that is practically inaudible. Shhh!



2-area motion detection sensor

Air flow is sent to a zone other than where the person is located at that moment. If no people are detected, the unit willautomatically switch over to the energy efficient setting.

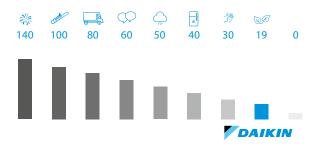





Flash streamer/ titanium apatite deodorising filter

Flash streamer: using electrons to trigger chemical reactions with airborne particles, the Flash Streamer removes allergens such as pollen and fungal allergens, eliminating unpleasant odours and providing better, cleaner air.

And the titanium apatite deodorising filter works hard to combat smells such as tobacco smoke and pets.

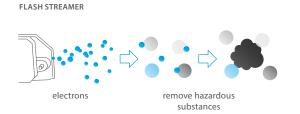





Silver allergen removal filter

The Silver allergen removal and air purifying filter is your solution, because it captures allergens such as pollen to ensure a steady supply of clean air.

Energy efficiency

The enhanced design of the Perfera boosts energy efficiency even further compared with previous models. It boasts a seasonal energy efficiency ratio (SEER) of up to 8.65 and a seasonal coefficient of performance (SCOP) of up to 5.10. This gives the Perfera **best-in-class performance**, with seasonal efficiency values up to A+++ in cooling and heating resulting in low running costs.

The Perfera is an energy-saving winner from every angle.






Heat boost

Heat boost quickly heats up your home when starting up your air conditioner. Set temperature is reached 14% faster* than a regular air conditioner (pair only).

*Heat Plus test condition: 50 class, outdoor temperature 2°C - Indoor temperature 10°C, R/C setting: 23°C

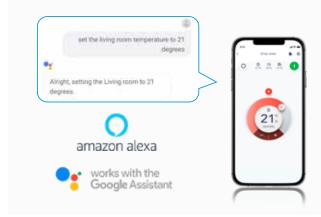

Intuitive online and voice control

NEW Control your system and enjoy maximum comfort, just by using your voice. Via Amazon Alexa or Google Assistant you can control main functions such as temperature set point, operation mode, fan speed, and much more!













Complete climate control with (de)humidification, air purification and ventilation with top efficiencies in heating and cooling

> Details on page 20









> Details on page 20



















> Details model optimised for heating on page 24

















perfera

Discreet, modern design for **optimal efficiency and comfort** thanks to 2-area motion detection sensor

- > Details on page 20
- > Details model optimised for heating on page 24













- > Details on page 21
- > Details model optimised for heating on page 24

















Wall mounted unit for low energy consumption and **pleasant comfort**

> Details on page 21

Daikin wall mounted units

offer you all sorts of advantages in several areas



Econo mode



2-area motion detection sensor



Guaranteed operation down to -25 °C



Comfort mode



Powerful mode



Whisper quiet



3D Air flow



Auto fan



Titanium apatite deodorising filter



Onecta app

Comfort

Creating the perfect climate is what Daikin units are all about. To ensure a perfect balance in 'comfort mode', cooling air is directed upwards to avoid cold draughts, and when the unit is heating the room, hot air is directed downwards to avoid cold air at floor level. If the temperature in the room is too high or too low, 'powerful mode' will quickly adjust the temperature appropriately until the room reaches the right temperature.

Superbly silent

Loud units are a thing of the past. Daikin systems are nearly inaudible. Enjoy year-round well-being without distracting noise.

Better air quality with the Daikin Flash Streamer*

Daikin's Ururu Sarara and Stylish and Perfera are all-in-one heating and cooling units that purify the air year round. Using electrons to trigger chemical reactions with air borne particles, the Flash Streamer breaks down allergens such as pollen and fungal allergens and removes bothersome odours providing a better, cleaner air.

Air flow

Daikin units' 3-D Air flow function combines vertical and horizontal auto-swing to ensure that the stream of warm or cool air reaches the corners of even the largest spaces. Auto fan speed ensures that the fan is running at the right speed to reach or maintain the temperature you have chosen.

Filter

For your health, you want the air that you breathe to be free of dust or other harmful particles. Daikin's titanium apatite deodorising filter decomposes bothersome odours of for example tobacco and pets.



Creating a fresh climate at home is about more than just pure comfort. Daikin systems are easy on your wallet and good for the environment, too. The next-generation refrigerant R-32 and optimised compressors make sure you stay in your comfort zone.

Seasonal efficiency in heating and cooling

Daikin's range of advanced energy-saving technologies provide high seasonal efficiencies in heating and cooling up to A+++, and our redesigned swing compressors are more efficient. Seasonal efficiency is a new way of rating heating and cooling products based on their energy efficiency over an entire year.

R-32: more efficient, better for the environment

Daikin uses R-32 refrigerant, a unit that emits fewer CO₂ emissions. That means they have lower global warming potential and are overall more efficient.



Daikin wall mounted units come with a standard wireless remote controller. Our online controller ensures that you are in control wherever you are. You can control your indoor units with an app (available for iOS and Android). The weekly timer can be set to start operation at any time on a daily or weekly basis.



With your new Daikin installation and Stand By Me service programme, you can rest assured you are benefiting from the best comfort, energy efficiency, usability and service available on the market.


Stand By Me advantages


- > Free warranty extension to both labour and parts.
- Daikin service partners are automatically notified when a customer registers their installation on www.standbyme.daikin.eu and needs maintenance.
- > Extended warranty on parts

Register your Daikin unit

www.standbyme.daikin.eu

^{*} The Flash Streamer technology is not meant to be used for medical purposes

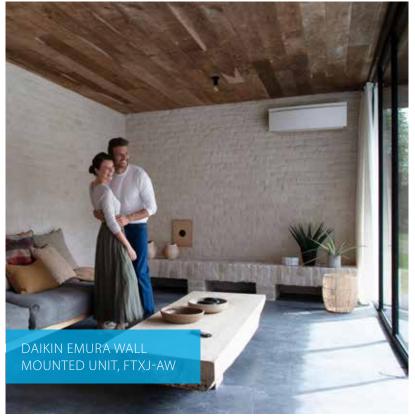

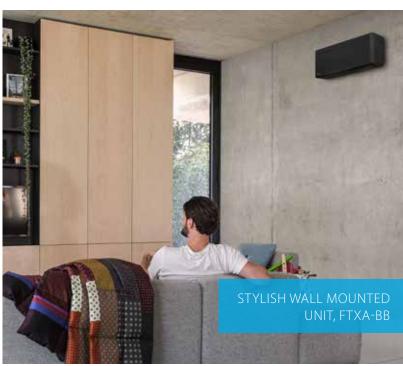







٦,		• • • • • • • •			Standard range Wall mounted		
) I I T			NEW		
)		olit	FTXZ-N	C/FTXA-AW/BS/BT/BB	FTXJ-AB/S/W	C/FTXM-R	FTXP-M(9)
	₹	Econo mode	•	•	•	•	•
	Ω <u>₩</u>	2-area motion detection sensor			•	•	
	() <u>u</u>	3- area motion detection sensor	•				
are		Energy saving during operation standby	•	•	•	•	•
We care		Home leave operation					
	::3 ::::::::::::::::::::::::::::::::::	Night set mode		•	•	•	•
	B	Fan only	•	•	•	•	•
	*	Auto cleaning filter	•				
		Comfort mode	•	•	•	•	•
	ROA	Powerful mode	•	•	•	•	•
	[A]	Auto cooling-heating changeover	•	•	•	•	•
		Whisper quiet (down to 19dBA)	•	•	•	•	•
	2	Practically inaudible		•	•	•	•
fort	公	Indoor unit silent operation	•	•	•	•	•
Comfort	4	Comfortable sleeping mode	•				
		Outdoor unit silent operation	•	•	•	•	
	ð	Fire place logic					
	1.8	Heat boost				•	
		Heat plus					
	献	Floor warming					
	3-D	3-D Air flow	•	•	•	•	•
		Vertical auto swing	•	•	•	•	•
>	~	Horizontal auto swing	•	•	•	•	•
Air flow	SJ.	Auto fan speed	•	•	•	•	•
Ā	8	Fan speed steps	5	5	5	5	5
	7	Intelligent thermal sensor		•			
	1.6	Coanda Effect	(cooling only)	(cooling and heating)			
>	∆ ∆	Ururu - humidification	•				
control	DRY	Sarara - dehumidification	•				
8		Dry programme		•	•	•	•
	E 0	Flash Streamer**	•	•		•	
ment	STREAMER	Titanium apatite	•	•	•	•	•
Air treatment		deodorising filter Silver allergen removal and air purifying filter			•	•	•
Air		Air filter	•	•	•	•	•
	O	Onecta app	•*	•	•	•	•*
Jer	24/7	Weekly timer	<u> </u>	•	•	•	
& tin	247	24 Hour timer	•		•	•	•
Remote control & timer	24/	Infrared remote control	•	•	•	•	•
te co		Wired remote control		•*	•*	•*	
Semo		Centralised remote control	•	•	•	•	
œ		Multi zoning					
S	# #	-	•	•	•	•	
Other functions	7	Auto-restart Self-diagnosis	•	•	•	•	•
r fun		Multi model application		•	•	•	•
e	₩ -25°	a.a model application		_	-		20,25,35 class

^{*} Available as option
**The Flash Streamer technology is not meant to be used for medical purposes

	Standard Wall mod	range			Optimised heating range	
UPDATE			NEW	NEW	Wall mounted NEW	UPDATE
FTXF-D	CTXF-C / FTXF-B	FTXC-C	FTXQ-A	FTXTA-BW/BB	FTXTM-R	FTXTP-M
	multionly					
•	•		•	•	•	•
					•	
•	•	•	•	•	•	•
			•	•	•	•
•	•	•	•	•	•	•
•	•		•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
				•	•	
•	•		•	•	•	•
		•				
				•	•	
				•	•	
				•	•	
•	•	•	•	•	•	•
			•	•	•	
•	•	•	•	•	•	•
3	3	5	5	5	5	5
				•		
•	•	•	•	•	•	•
				•	•	
		•		•	•	•
•	•	•	•	•	•	•
*	•*	•*	•	•	*	•*
•	•	•		•	•	•
•	•	•	•	•	•	•
				•*	•*	
				•	•	
•	•	•	•	•	•	•
•	•	•	•	•	•	•
	20,25,35 class					

Standard range



FTXZ-N + RXZ-N

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic ording to El	•		Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refrig	jerant
-	Min./Nom./	Min./Nom./	Cooling/H (Average c		Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Charge
	Max. (kW)	Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/Nom./High (dBA)	Silent operation/ Low/Nom./High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	(kg/TCO2Eq)
FTXZ25N/RXZ25N	0.6/2.5/3.9	0.6/3.6/7.5		2.50/3.50	9.54	5.90	92/831		19/26/33/38	19/28/35/39	54/56	59/59		
FTXZ35N/RXZ35N	0.6/3.5/5.3	0.6/5.0/9.0	A***	3.50/4.50	9.00	5.73	136/1,100	295 x 798 x 372	19/27/35/42	19/29/36/42	57/57	61/61	R-32/675	1.34/0.9
FTXZ50N/RXZ50N	0.6/5.0/5.8	0.6/6.3/9.4		5.00/5.60	8.60	5.50	203/1,427		23/30/38/47	24/31/38/44	60/59	63/64		



PAIKIN FTXJ-AB/S/W + RXJ-A

				Efficiency					Indoor	unit			Outdoor unit	
No.	Cooling capacity	Heating capacity			easonal effic ording to EN	•		Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refrig	jerant
	N	N	Cooling/He (Average cl		Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	6	Cooling/		CI.
ETY I 200AW/S/B RY I 200A	Nom. (kW)	Nom. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/High (dBA)	Silent operation/ Low/High (dBA)	Cooling (dBA)	Heating (dBA)	Type/GWP	Charge (kg/TCO2Eq)
FTXJ20AW/S/B RXJ20A	1.3/2.0/2.6	1.3/2.5/3.5		2.00/2.40	8.75		80/653		39/32/25/19*	39/32/25/19*		59/59		
FTXJ25AW/S/B RXJ25A	1.3/2.5/3.2	1.3/2.8/4.7		2.50/2.45	8.74	5.15	100/666		40/33/25/19*	40/33/25/19*	57	39/39		0.76/0.52
FTXJ35AW/S/B RXJ35A	1.4/3.4/4.0	1.4/4.0/5.2		3.40/2.50	8.73		136/680	305x900x214	41/33/25/19*	41/33/25/19*		61/61	R-32/675.0	
FTXJ42AW/S/B RXJ42A	1.7/4.2/5.0	1.7/5.4/6.0	A** / A**	4.20/3.80	7.50	4.60	196/1.150		45/37/29/21*	45/37/29/21*	60	62/62		1.10/0.75
FTXJ50AW/S/B RXJ50A	1.7/5.0/5.3	1.7/5.8/6.5		5.00/4.00	7.33	4.00	239/1.217		46/39/31/24*	46/42/33/24*	00	02/02		1.10/0./3

^{*}Note: blue cells contain preliminary data

stylish FTXA-AW/BS/BT/BB + RXA-A9/B

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic ording to El			Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refrig	jerant
	N	Nam	Cooling/H (Average cl	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Chausa
CTXA15AW/BS/BT/BB	Nom. (kW)	Nom. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/High (dBA)	Silent operation/ Low/High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	Charge (kg/TCO2Eq)
CTXA15AW/BS/BT/BB			multi	connection o	nly				19/25/39	19/25/39		mu	ti connection o	only
FTXA20AW/BS/BT/BB / RXA20A9	1.3/2.0/2.6	1.30/2.50/3.50		2.00/2.40	8.75	5.15	80/653		19/25/39	19/25/39	57	59/59	R-32/675.0	0.76/0.52
FTXA25AW/BS/BT/BB / RXA25A9	1.3/2.5/3.2	1.30/2.80/4.70	A*** / A***	2.50/2.45	8.74	5.15	101/666	295x798x189	19/25/40	19/25/40				
FTXA35AW/BS/BT/BB / RXA35A9	1.4/3.4/4.0	1.40/4.00/5.20		3.40/2.50	8.73	5.15	137/680	2938/908109	19/25/41	19/25/41		61/61		
FTXA42AW/BS/BT/BB / RXA42B	1.7/4.2/5.0	1.70/5.40/6.00	A** / A**	4.20/3.80	7.50	4.60	196/1,150		21/29/45	21/29/45	60	62/62		1.10/0.75
FTXA50AW/BS/BT/BB / RXA50B	1.7/5.0/5.3	1.70/5.80/6.50		5.00/4.00	7.33	4.60	239/1,217		24/31/46	24/31/46 24/33/46				

perfero C/FTXM-R + RXM-R9

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic ording to EN			Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refri	gerant
Plant Collins	Min /None /	Min /None /	Cooling/He (Average cli	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Chausa
	Min./Nom./ Max. (kW)	Min./Nom./ Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/Nom./High (dBA)	Silent operation/ Low/Nom./High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	Charge (kg/TCO2Eq)
CTXM15R / RXM20R9	1.3/2.0/2.6	1.30/2.50/3.50		2.00/2.30			81/632		19/25/41	20/26/39	57 /54	59/59		
FTXM25R / RXM25R9	1.3/2.5/3.2	1.30/2.80/4.70		2.50/2.40	8.65	5.10	101/659	295 x 778 x 272	19/23/41	20/27/39	37/34	39/39	R-32/675.0	0.76/0.52
FTXM35R / RXM35R9	1.4/3.4/4.0	1.40/4.00/5.20		3.40/2.50			138/687	293 X / / 6 X 2 / 2	19/29/45	20/28/39	58/54	61/61		
FTXM42R / RXM42R	1.70/4.20/5.00	1.70/5.40/6.00	A** / A**	4.20/4.00	7.85	4.71	187/1,189		21/30/45	21/29/45	60/60	62/62		1.10/0.750
FTXM50R / RXM50R	1.70/5.00/6.00	1.70/5.80/7.70	A //A	5.00/4.60	7.41	4.71	236/1,369		27/36/44	31/34/43	58/58	02/02	2 22/475	1.15/0.780
FTXM60R / RXM60R	1.70/6.00/7.00	1.70/7.00/8.00	A** // A*	6.00/4.80	6.90	4.30	304/1,562	299 x 998 x 292	30/37/46	33/36/45	60/59	63/63	R-32/675	1.15/0.780
FTXM71R / RXM71R	2.30/7.10/8.50	2.30/8.20/10.20		7.10/6.20	6.20	4.10	401/2,115		32/38/47	34/37/46	60 /61	66 /67	R-32/675.0	1.15/0.78

comfora FTXP-M9 + RXP-M

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic ording to El			Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refrig	gerant
(B) - 1	Min./Nom./	Min./Nom./	Cooling/Ho (Average cl	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Charge
	Max. (kW)	Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/High (dBA)	Silent operation/ Low/High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	Charge (kg/TCO2Eq)
FTXP20M9 / RXP20M	1.3/2.00/2.6	1.30/2.50/3.50		2.00/2.20	6.79	4.65	103/662		19/25/39	21/28/39/-	55/55	60/61		
FTXP25M9 / RXP25M	1.3/2.50/3.0	1.30/3.00/4.00	A** /A**	2.50/2.40	6.92	4.61	126/728	286 x 770 x 225	19/26/40	21/28/40/-	33/33	00/01		0.55/0.37
FTXP35M9 / RXP35M	1.3/3.50/4.0	1.30/4.00/4.80		3.50/2.80	6.62	4.64	186/845		20/27/43	21/29/40/-	58/58	62/62	D 22/675 0	
FTXP50M / RXP50M	1.7/5.0/6.0	1.7/6.0/7.7	A**	5.00/4.60	7.30	4.40	240/1,463		27/34/43	-/30/38/42	59/61	61/61	R-32/675.0	0.70/0.48
FTXP60M / RXP60M	1.7/6.0/7.0	1.7/7.0/8.0		6.00/4.80	6.82	4.10	308/1,638	295 x 990 x 263	30/36/45	-/32/40/44	60/62	63/63		0.90/0.61
FTXP71M / RXP71M	2.3/7.1/7.3	2.3/8.2/9.0	A ⁺	7.10/6.20	6.20	4.01	401/2,166		32/37/46	-/33/41/45	62/62	66/65		1.15/0.78

Multi model application

												Wall	mounte	d									
OUTDOOR UNITS	CONNECTABLE INDOOR UNITS	CTXA-AW/ BS/BT/BB		FTX	A-AW/B	S/BT		CTXM-R				FTXM-R					F	TXJ-AB/S	/W			FTXP-M	9
		15	20	25	35	42	50	15	20	25	35	42	50	60	71	20	25	35	42	50	20	25	35
	2MXM40A	•	•	•	•			•	•	•	•					•	•	•			•	•	•
	2MXM50A	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
	2MXM68A	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
	3MXM40A	•	•	•	•			•	•	•	•					•	•	•					
Multi	3MXM52A	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•
	3MXM68A	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•
	4MXM68A	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•			
	4MXM80A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
	5MXM90A	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
Multi+	4MWXM52A	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•			

Sensira FTXF-D + RXF-D

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic ording to El			Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refriç	gerant
	Min /None /	Min /None /	Cooling/H (Average c	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Chausa
0	Min./Nom./ Max. (kW)	Min./Nom./ Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/High (dBA)	Silent operation/ Low/High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	Charge (kg/TCO2Eq)
FTXF20D / RXF20D	1.3/2.00/2.4	1.30/2.40/3.30		2.00 / 2.20	6.22	4.11	113		20/25/39	21/28/39	53/55	60/60		0.450 /0.300
FTXF25D / RXF25D	1.3/2.50/2.8	1.30/2.80/3.70		2.50 / 2.40	6.22	4.11	141	286 x 770 x 225	20/26/40	21/28/40	54/55	60/60		0.430 / 0.300
FTXF35D / RXF35D	1.3/3.30/3.8	1.30/3.50/4.40	A** /A*	3.50 / 2.60	6.22	4.11	197	200 X / / 0 X 2 2 3	20/27/43	21/29/40	54/56	61/62		0.550 / 0.370
FTXF42D / RXF42D	1.4/4.20/4.3	1.40/4.60/5.00	A	4.20 / 3.30	6.50	4.30	226		22/30/45	22/28/44	59/59	61/62	R-32/675	0.750 / 0.510
FTXF50D / RXF50D	1.7/5.0/6.0	1.70/6.0/7.70		5.00/4.60	6.21	4.06	282/1,585		31/34/43	30/33/42	59/61	61/61		0.90/0.61
FTXF60D / RXF60D	1.7/6.0/7.0	1.70/6.4/8.00		6.00/4.80	6.15	4.06	342/1,653	295 x 990 x 263	33/36/45	32/35/44	60/62	63/63		1.15/0.78
FTXF71D / RXF71D	2.3/7.1/7.3	2.3/8.2/9.00	A /A	7.10/6.20	5.15	3.81	483/2,278		34/37/46	33/36/45	62/62	66/65		1.15/0./8

^{*}Note: blue cells contain preliminary data

Sensira FTXC-C+ RXC-C

				Efficiency					Indoor unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effi cording to E			Dimensions	Sound pressure level	Sound power level	Sound power level	Refri	gerant
France W.	Min./Nom./	Min./Nom./	Cooling/H (Average c	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Cooling/	Cooling/		Chargo
	Max. (kW)	Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/Low/High/ Super high (dBA)	Heating (dBA)	Heating (dBA)	el	Charge (kg/TCO2Eq)
FTXC20C / RXC20C	1.3/2.0/3.0	1.3/2.5/4.0		2.08	6.89	4.40	106/594		20/26/38	54	58/-		0.550/0.371
FTXC25C / RXC25C	1.3/2.56/3.0	1.3/2.84/4.0		2.57	6.84	4.45	132/700	288 x 770 x 234	20/20/30	34	30/-		0.550/0.571
FTXC35C / RXC35C	1.3/3.5/4.0	1.30/4.0/4.80	A** /A*	3.44	6.87	4.28	175/732	200 X / / U X 2 3 4	21/26/39	55	60 /-	D 22/675	0.750/0.506
FTXC50C / RXC50C	1.4/5.1/6.2	1.36/5.62/6.60		5.08	6.45	4.42	276/1,236		29/33/45	57	65 /-	N-32/0/3	1.00/0.675
FTXC60C / RXC60C	1.8/6.2/7.0	1.48/6.40/8.00		6.21	6.40	4.24	340/1,354	297 x 990 x 273	30/38/46	60	66 /-		1.10/0.743
FTXC71C / RXC71C	2.3/7.1/7.3	2.30/8.0/9.00	A /A	6.96	5.30	3.81	459/2,334	29/ X 990 X 2/3	30/38/40	00	69/-		1.15/0.776

Sensira FTXQ-A + RXQ-A

				Efficiency					Indoor	unit			Outdoor unit	
	Cooling capacity	Heating capacity			easonal effic cording to E			Dimensions	Sound pre	ssure level	Sound power level	Sound power level	Refrig	gerant
	Min./Nom./	Min./Nom./	Cooling/H (Average c	•	Cooling	Heating (Average climate)	Cooling/Heating (Average climate)	Unit	Cooling	Heating	Cooling/	Cooling/		Charge
	Max. (kW)	Max. (kW)	Energy efficiency class	Pdesign (kW)	SEER	SCOP/A	Annual energy consumption (kWh)	Height x Width x Depth (mm)	Silent operation/ Low/High (dBA)	Silent operation/ Low/High (dBA)	Heating (dBA)	Heating (dBA)	Type/GWP	(kg/TCO2Eq)
FTXQ25A / RXQ25A	1.30/2.50/3.00	1.3/2.5/4.0	A** /A*	2.30	3.24	3.71	386	291 x770 x232	23.0 /26.0 /40.0	25.0 /29.0 /40.0		61.0	R-32/675	0.500/0.340
FTXQ35A / RXQ35A	1.30/3.50/3.80	1.3/2.84/4.0		2.40	3.24	3./1	540	291 X//U X232	24.0 /28.0 /41.0	25.0 /30.0 /42.0	55	62.0		0.710/0.480



Designed for lwiving: solutions for even the coldest regions


Designed for colder climates, Optimised Heating 4 creates a comfortable interior environment while maintaining excellent energy efficiency ratings.

Reliability

To guarantee the seamless operation of your heating system, even in temperatures as low as -25°C, the Optimised Heating 4 range offers enhanced features.

Easy Installation: long piping


The Daikin Optimised 4 offers a quick and easy installation process, which includes extended piping: This longer piping is specifically adapted to accommodate the thicker walls of Scandinavian buildings, and help contractors cut down on installation time.

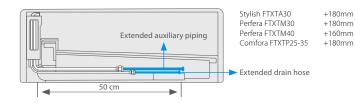

The fireplace scenario

Stylish FTXTA and Perfera FTXTM are flexible and easy to adapt for any room, including spaces that contain additional heat sources, such as a fireplace.


- If the temperature in the room reaches the desired point set by user, the operation FIREPLACE LOGIC (if activated) will start automatically.
- The unit will distribute hot air from the external source across the room using the unit's fan.
- The fan speed and the intensity of distribution depends on difference between temperature set by user and actual temperature in the room (in case of big difference between these temperatures the air distribution will be more intensive)



Measured temperature in the room ≥ set temperature = Thermo off Fan auto adjust according to ΔT


The Coanda effect

The **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room

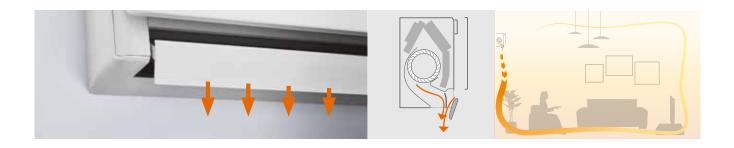


Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels. Sound dispersion and noise reduction are the results of a special fan design.

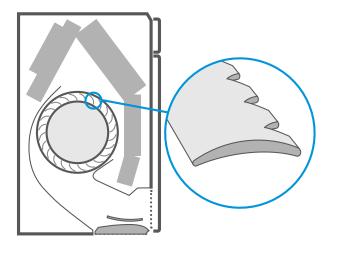

Dual Airflow

Our floor standing FVXM is ideal for heating comfort thanks to its dual airflow. Wide air flow coverage in both upward and downward directions allowing even air distribution.

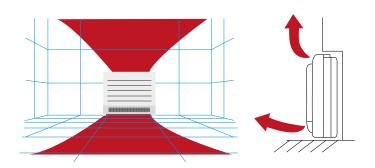

During heating operating, your feet stay warm and the temperature through the room is evenly distributed. Maximum comfort will be ensured.

Intelligent thermal sensor

Stylish uses an Intelligent thermal sensor to detect the surface temperature of a room to create a more comfortable climate. After determining the current room temperature, the grid eye sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.



Bluevolution Range

BLUEVOLUTION

Туре	Model	Product Name	25	30	35	40
Wall mounted	Stylish: Where innovation meets creativity, even at ambient temperatures down to -25°C	FTXTA-BW/BB		(pair only)		
Wall mounted	Perfera: Discreet, modern design for optimal efficiency and comfort thanks to 2- area motion detector sensor	FTXTM-R		A**** (pair only)		(pair only)
Wall mounted	Comfora: Wall mounted unit, provid- ing high efficiency and comfort while reducing the environmental impact	FTXTP-M	A"* (pair only)		A"* (pair only)	
Floor Standing Unit	Design floor standing unit for optimal heating comfort thanks to unique heating features	FVXM-A	(pair only)		A*** (pair only)	
Wall mounted	Wall mounted unit Siesta: providing high efficiency and comfort while reducing the environmental impact	ATXTP-M	A** * (pair only)		A** * (pair only)	

^{*} Space heating - average climate

Optimised heating

range

stylish FTXTA-BW/BB





Where innovation meets creativity, even at ambient temperatures down to -25°C

- > Seasonal efficiency values: A+++ in heating
- > The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.
- > Fresher, cleaner air thanks to Daikin's Flash Streamer technology: you can breathe deep with no worries about impure air.
- > When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house.

Capacity class		Season	al efficienc	y (accordi	ng to EN	14825)			Ind	oor unit		Outdo	or unit	Refrigerant				
	Cooling capacity	Heating capacity	Energy label	Pdesign	SEER	SCOP	Annual energy consumption	Dimensions	Sound power level	Sound pressure level		Sound power level	Sound pressure level					
	Min./Nom./ M	Min./Nom./ Max. (kW)	Cooling/ Heating	Cooling/ Heating (kW)	Cooling	Heating	Cooling/ Heating (kWh)	H x W x D (mm)	Cooling/	Cooling (dBA)	Heating (dBA)	Cooling/	Cooling/Heating		Charge			
	Max. (kW)								Heating (dBA)	Silent/Low/Medium/High		Heating (dBA)	(dBA) Nom	Type/GWP	(kg/TCO ₂ Eq)			
30	0.7/3.0/4.5	0.8/3.2/6.9	A** // A***	3.0/2.6	7.63	5.12	138/714	295x798x189	60/60	20/25/32/43	19/24/31/41	61/61	48/49	R-32/675	1.1/0.75			

contains fluorinated greenhouse gases

era ftxtm-r

BLUEVOLUTION



Attractive, wall mounted design with perfect indoor air quality, even at ambient temperatures down to -25°C

- > Seasonal efficiency values: full range A+++ in heating
- > Fresher, cleaner air thanks to Daikin's Flash Streamer technology: you can breathe deep with no worries about impure air.
- > When installed close to a heating device (e.g. fire place or oven) and the set temperature is reached, the fan keeps on running to have an even temperature throughout the whole house.
- > Heat boost quickly heats up your home when starting up your airconditioner. Set temperature is reached 14% faster than a regular airconditioner.

		Seasor	nal efficien	cy (accord	ling to EN	114825)			Ind	oor unit		Outdo	oor unit	Refrig	gerant
Capacity class	Cooling capacity	Heating capacity	Energy label	Pdesign	SEER	SCOP	Annual energy consumption	Dimensions	Sound power level		und re level	Sound power level	Sound pressure level		
	Min./Nom./	Min./Nom./	Cooling/	Cooling/			Cooling/		Cooling/	Cooling (dBA)	Heating (dBA)	Cooling/ Heating	Cooling/ Heating (dBA) Nom		Charge (kg/TCO ₂ Eq)
	Max. (kW)	Max. (kW)	Heating	Heating (kW)	Cooling	Heating	Heating (kWh)	H x W x D (mm)	Heating (dBA)	Silent/Low/	Medium/High	(dBA)		Type/GWP	
30	0.7/3.0/4.5	0.8/3.2/6.7	A** /	3.0/3.0	7.6	5.12	138/821	295x778x292	(0/(1	21/25/33/45	19/22/31/45	(1/(1	40/40	0.33/675	1 1/0 75
40	0.7/4.0/5.1	0.8/4.0/7.2	A***	4.0/3.8	7.7	5.3	182/1003	299x998x292	60/61	20/24/32/46	19/22/31/46	61/61	48/49	R-32/675	1.1/0.75

contains fluorinated greenhouse gases

omfora ftxtp-M





Discreet wall mounted unit providing high efficiency and comfort, even at ambient temperatures down to -25°C

- > Seasonal efficiency values: full range A+++ in cooling and heating
- > Space saving contemporary wall mounted design
- > 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even

Capacity class		Seaso	nal efficien	cy (accord	ling to EN	14825)			Ind	oor unit		Outdo	oor unit	Refrigerant	
	Cooling capacity	Heating capacity	Energy label	Pdesign	SEER	SCOP	Annual energy consumption	Dimensions	Sound power level	Sound pressure level		Sound power level	Sound pressure level		
	Min./Nom./	Min./Nom./	Cooling/	Cooling/			Cooling/	H x W x D (mm) Cooling/ Heating (dBA)		Cooling (dBA)	Heating (dBA)	Cooling/ Heating	Cooling/Heating		Charge
	Max. (kW)	Max. (kW)	Heating	Heating (kW)	Cooling	Heating	Heating (kWh)		Silent/Low/N	Silent/Low/Medium/High		(dBA) Nom	Type/GWP	(kg/TCO ₂ Eq)	
25	0.8/2.5/4.0	1.2/3.2/6.2	A** /	2.5/2.5	7.1	4.93	123/710	285x770x225 58/58		21/26/25/42		(1)(1	40/40	D 22/675	1.1/0.75
35	0.8/3.5/4.4	1.2/4.0/6.7	A**	3.5/3	7.2	4.81	170/873	285x770x225	38/38	21/26/35/43		61/61	48/49	R-32/675	1.1/0.75

contains fluorinated greenhouse gases












 $\textbf{Daikin Europe N.V.} \quad \text{Naamloze Vennootschap Zandvoordestraat 300} \cdot 8400 \ \text{Oostende} \cdot \text{Belgium} \cdot \text{www.daikin.eu} \cdot \text{BE 0412 120 336} \cdot \text{RPR Oostende (Publisher)}$

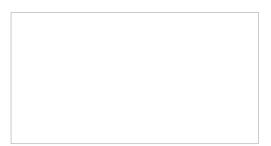



ECPEN22-005 12/





Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper.