

# Air Conditioning Technical Data

## RXTA-C





---

# TABLE OF CONTENTS

## RXTA-C

---

1	<b>Features</b>	4
	RXTA-C	4
2	<b>Specifications</b>	5
3	<b>Electrical data</b>	29
4	<b>Capacity tables</b>	30
	Cooling/Heating Capacity Tables	30
5	<b>Dimensional drawings</b>	31
6	<b>Centre of gravity</b>	32
7	<b>Piping diagrams</b>	33
8	<b>Wiring diagrams</b>	34
	Wiring Diagrams - Three Phase	34
9	<b>Sound data</b>	35
	Sound Power Spectrum	35
	Sound Pressure Spectrum	36
10	<b>Operation range</b>	37

# 1 Features

## 1 - 1 RXTA-C

- › Guaranteed heating operation at low ambient temperature, down to -30°C
- › Developed for regions with severe winter conditions

**1****-30°**

Guaranteed  
operation  
down to -30°C

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXTA30BB + RXTA30C	
Cooling capacity	Min.		kW	0.70
	Min.		Btu/h	2,400
	Min.		kcal/h	602
	Nom.		kW	3.00
	Nom.		Btu/h	10,200
	Nom.		kcal/h	2,580
	Max.		kW	4.50
	Max.		Btu/h	15,400
	Max.		kcal/h	3,869
Heating capacity	Min.		kW	0.80
	Min.		Btu/h	2,700
	Min.		kcal/h	700
	Nom.		kW	3.20
	Nom.		Btu/h	10,900
	Nom.		kcal/h	2,752
	Max.		kW	6.90
	Max.		Btu/h	23,500
	Max.		kcal/h	5,933
Power input	Cooling	Nom.	kW	0.71
	Heating	Nom.	kW	0.66
Nominal efficiency	EER			4.20
	COP			4.87
	Annual energy consumption		kWh	357
	Energy labeling	Cooling		A
	Heating		A	
Space cooling	Energy efficiency class			A++
	Capacity	Pdesign	kW	3.00
	SEER			7.63
	Annual energy consumption		kWh/a	138
Space heating (Average climate)	Capacity	Pdesign	kW	2.60
	Energy efficiency class			A+++
	SCOP/A			5.10
	SCOPnet/A			5.12
	Pdh Heating capacity at -10°		kW	2.60
	Annual energy consumption		kWh/a	714
	Required back up heating cap at design conditions		kW	0.00
Space heating (Cold climate)	Capacity	Pdesignh	kW	3.80
	Energy efficiency class			A+
	SCOP/C			4.07
	SCOPnet/C			4.13
	Annual energy consumption		kWh/a	1,960
	Required back up heating cap at design conditions		kW	0.92
Space cooling	A Condition	Pdc	kW	3.00
	(35°C - 27/19)	EERd		4.20
		Power input	kW	0.71
	B Condition	Pdc	kW	2.22
	(30°C - 27/19)	EERd		5.92
		Power input	kW	0.38
	C Condition	Pdc	kW	1.56
	(25°C - 27/19)	EERd		8.83
		Power input	kW	0.18
	D Condition	Pdc	kW	1.09
	(20°C - 27/19)	EERd		12.91
		Power input	kW	0.08

## 2 Specifications

### 2 - 1 Specifications

Technical specifications					FTXTA30BB + RXTA30C		
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-10		
		COPd (declared COP)			2.85		
	TBivalent	Tbiv (bivalent temperature)		°C	-10		
		Pdh (declared heating cap)		kW	2.60		
		COPd (declared COP)			2.85		
		Power input		kW	0.91		
	A Condition (-7°C)	Pdh (declared heating cap)		kW	2.31		
		COPd (declared COP)			3.62		
		Power input		kW	0.64		
	B Condition (2°C)	Pdh (declared heating cap)		kW	1.40		
		COPd (declared COP)			5.18		
		Power input		kW	0.27		
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.04		
		COPd (declared COP)			6.19		
		Power input		kW	0.17		
D Condition (12°C)	Pdh (declared heating cap)		kW	1.18			
	COPd (declared COP)			7.59			
	Power input		kW	0.16			
Space heating (Cold climate)	TOL	Tol (temperature operating limit)		°C	-22		
Space heating (Cold climate)	TOL	Pdh (declared heating cap)		kW	2.88		
		COPd (declared COP)			1.73		
		Power input		kW	1.66		
	TBivalent	Tbiv (bivalent temperature)		°C	-15		
		Pdh (declared heating cap)		kW	3.10		
		COPd (declared COP)			1.95		
		Power input		kW	1.59		
	A Condition (-15°C)	Pdh (declared heating cap)		kW	3.10		
		COPd (declared COP)			1.95		
		Power input		kW	1.59		
	A Condition (-7°C)	Pdh (declared heating cap)		kW	2.31		
		COPd (declared COP)			3.62		
		Power input		kW	0.64		
	B Condition (2°C)	Pdh (declared heating cap)		kW	1.40		
		COPd (declared COP)			5.18		
		Power input		kW	0.27		
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.04		
		COPd (declared COP)			6.19		
		Power input		kW	0.17		
	D Condition (12°C)	Pdh (declared heating cap)		kW	1.18		
		COPd (declared COP)			7.59		
		Power input		kW	0.16		
	Power consumption in other than active mode	Crankcase heater mode	PCK		W	0	
		Off mode	POFF		W	1	
		Standby mode	Cooling	PSB		W	1
			Heating	PSB		W	1
		Thermostat-off mode	PTO	Cooling		W	8
Heating				W	15		
Cooling	Cdc (Degradation cooling)				0.25		
Heating	Cdh (Degradation heating)				0.25		
Cooling function included					Yes		
Heating function included					Yes		
Average climate included					Yes		
Cold season included					Yes		
Warm season included					No		
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	61		
		Cooling	Nom.	dB(A)	60		
Eurovent	Sound power level indoor	Cooling	Measuring condition	m	5.00		
		Cooling	Measuring condition	m	5.00		

Electrical specifications					FTXTA30BB + RXTA30C	
Power factor	Nominal	Cooling		%	97.60	
		Heating		%	94.80	

## 2 Specifications

### 2 - 1 Specifications

Electrical specifications				FTXTA30BB + RXTA30C
Current	Nominal running current (RLA)	Cooling	A	3.20
	Nominal running current (RLA) - 50Hz	Heating	A	3.00
Current - 50Hz	Maximum fuse amps (MFA)		A	16.00

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for electrical data |

(4)See separate drawing for operation range

Technical specifications				FTXTA30BW + RXTA30C
Cooling capacity	Min.		kW	0.70
	Min.		Btu/h	2,400
	Min.		kcal/h	602
	Nom.		kW	3.00
	Nom.		Btu/h	10,200
	Nom.		kcal/h	2,580
	Max.		kW	4.50
	Max.		Btu/h	15,400
	Max.		kcal/h	3,869
Heating capacity	Min.		kW	0.80
	Min.		Btu/h	2,700
	Min.		kcal/h	700
	Nom.		kW	3.20
	Nom.		Btu/h	10,900
	Nom.		kcal/h	2,752
	Max.		kW	6.90
	Max.		Btu/h	23,500
	Max.		kcal/h	5,933
Power input	Cooling	Nom.	kW	0.71
	Heating	Nom.	kW	0.66
Nominal efficiency	EER			4.20
	COP			4.87
	Annual energy consumption		kWh	357
	Energy labeling Directive	Cooling		A
	Heating		A	
Space cooling	Energy efficiency class			A++
	Capacity	Pdesign	kW	3.00
	SEER			7.63
	Annual energy consumption		kWh/a	138
Space heating (Average climate)	Capacity	Pdesign	kW	2.60
	Energy efficiency class			A+++
	SCOP/A			5.10
	SCOPnet/A			5.12
	Pdh Heating capacity at -10°		kW	2.60
	Annual energy consumption		kWh/a	714
	Required back up heating cap at design conditions		kW	0.00
Space heating (Cold climate)	Capacity	Pdesignh	kW	3.80
	Energy efficiency class			A+
	SCOP/C			4.07
	SCOPnet/C			4.13
	Annual energy consumption		kWh/a	1,960
	Required back up heating cap at design conditions		kW	0.92
	Space cooling	A Condition	Pdc	kW
(35°C - 27/19)		EERd		4.20
		Power input	kW	0.71
B Condition		Pdc	kW	2.22
(30°C - 27/19)		EERd		5.92
		Power input	kW	0.38
C Condition		Pdc	kW	1.56
(25°C - 27/19)		EERd		8.83
		Power input	kW	0.18
D Condition		Pdc	kW	1.09
(20°C - 27/19)		EERd		12.91
		Power input	kW	0.08

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications					FTXTA30BW + RXTA30C	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C	-10	
		COPd (declared COP)			2.85	
	TBivalent	Tbiv (bivalent temperature)		°C	-10	
		Pdh (declared heating cap)		kW	2.60	
		COPd (declared COP)			2.85	
		Power input		kW	0.91	
	A Condition (-7°C)	Pdh (declared heating cap)		kW	2.31	
		COPd (declared COP)			3.62	
		Power input		kW	0.64	
	B Condition (2°C)	Pdh (declared heating cap)		kW	1.40	
		COPd (declared COP)			5.18	
		Power input		kW	0.27	
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.04	
		COPd (declared COP)			6.19	
		Power input		kW	0.17	
D Condition (12°C)	Pdh (declared heating cap)		kW	1.18		
	COPd (declared COP)			7.59		
	Power input		kW	0.16		
Space heating (Cold climate)	TOL	Tol (temperature operating limit)		°C	-22	
Space heating (Cold climate)	TOL	Pdh (declared heating cap)		kW	2.88	
		COPd (declared COP)			1.73	
		Power input		kW	1.66	
	TBivalent	Tbiv (bivalent temperature)		°C	-15	
		Pdh (declared heating cap)		kW	3.10	
		COPd (declared COP)			1.95	
		Power input		kW	1.59	
	A Condition (-15°C)	Pdh (declared heating cap)		kW	3.10	
		COPd (declared COP)			1.95	
		Power input		kW	1.59	
	A Condition (-7°C)	Pdh (declared heating cap)		kW	2.31	
		COPd (declared COP)			3.62	
		Power input		kW	0.64	
	B Condition (2°C)	Pdh (declared heating cap)		kW	1.40	
		COPd (declared COP)			5.18	
		Power input		kW	0.27	
	C Condition (7°C)	Pdh (declared heating cap)		kW	1.04	
		COPd (declared COP)			6.19	
		Power input		kW	0.17	
	D Condition (12°C)	Pdh (declared heating cap)		kW	1.18	
		COPd (declared COP)			7.59	
		Power input		kW	0.16	
	Power consumption in other than active mode	Crankcase heater mode	PCK		W	0
			Off mode		POFF	W
		Standby mode	Cooling	PSB	W	1
			Heating	PSB	W	1
		Thermo-stat-off mode	PTO	Cooling	W	8
				Heating	W	15
	Cooling	Cdc (Degradation cooling)			0.25	
	Heating	Cdh (Degradation heating)			0.25	
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					Yes	
Warm season included					No	
Eurovent	Sound power level outdoor	Cooling	Nom.	dB(A)	61	
		Cooling	Nom.	dB(A)	60	
Eurovent	Piping length	Cooling	Measuring condition	m	5.00	

Electrical specifications					FTXTA30BW + RXTA30C	
Power factor	Nominal	Cooling	%		97.60	
		Heating	%		94.80	

## 2 Specifications

### 2 - 1 Specifications

Electrical specifications				FTXTA30BW + RXTA30C
Current	Nominal running current (RLA)	Cooling	A	3.20
	Nominal running current (RLA) - 50Hz	Heating	A	3.00
Current - 50Hz	Maximum fuse amps (MFA)		A	16.00

(1)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(2)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. |

(3)See separate drawing for electrical data |

(4)See separate drawing for operation range

Technical specifications				FTXTA30CB + RXTA30C	
Cooling capacity	Min.		kW	1.2	
	Min.		Btu/h	4,100	
	Min.		kcal/h	1,032	
	Nom.		kW	3	
	Nom.		Btu/h	10,200	
	Nom.		kcal/h	2,580	
	Max.		kW	4.6	
	Max.		Btu/h	15,700	
	Max.		kcal/h	3,955	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.		kW	1.2	
	Min.		Btu/h	4,100	
	Min.		kcal/h	1,032	
	Nom.		kW	3	
	Nom.		Btu/h	10,200	
	Nom.		kcal/h	2,580	
	Max.		kW	4.6	
	Max.		Btu/h	15,700	
	Max.		kcal/h	3,955	
Heating capacity	Min.		kW	0.8	
	Min.		Btu/h	2,700	
	Min.		kcal/h	688	
	Nom.		kW	3.2	
	Nom.		Btu/h	10,900	
	Nom.		kcal/h	2,752	
	Max.		kW	7.1	
	Max.		Btu/h	24,200	
	Max.		kcal/h	6,105	
Heating capacity - Low sound mode (Stb. 2020, 189)	Min.		kW	0.8	
	Min.		Btu/h	2,700	
	Min.		kcal/h	688	
	Nom.		kW	3.2	
	Nom.		Btu/h	10,900	
	Nom.		kcal/h	2,752	
	Max.		kW	7.1	
	Max.		Btu/h	24,200	
	Max.		kcal/h	6,105	
Power input	Cooling	Nom.	kW	0.61	
	Heating	Nom.	kW	0.64	
Power input - Low sound mode (Stb. 2020, 189)	Cooling	Nom.	kW	0.61	
	Heating	Nom.	kW	0.64	
Nominal efficiency	EER			4.89	
	COP			5.01	
	Annual energy consumption		kWh	307	
	Energy labeling Directive	Cooling		A	
		Heating		A	
Nominal efficiency - Low sound mode (Stb. 2020, 189)	EER			4.89	
	COP			5.01	
	Annual energy consumption		kWh	307	
	Energy efficiency class			A+++	
Space cooling	Capacity	Pdesign	kW	3	
	SEER			8.75	
	Annual energy consumption		kWh/a	120	
	Capacity	Pdesign	kW	3	
Space cooling - Low sound mode (Stb. 2020, 189)	SEER			8.75	
	Annual energy consumption		kWh/a	120	

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30CB + RXTA30C	
Space heating (Average climate)	Capacity	Pdesign	kW	3	
	Energy efficiency class			A+++	
	SCOP/A			5.17	
	SCOPnet/A			5.18	
	Pdh Heating capacity at -10°		kW	3	
	Annual energy consumption			kWh/a 812	
	Required back up heating cap at design conditions			kW 0	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3	
	SCOP/A			5.17	
	SCOPnet/A			5.18	
	Pdh Heating capacity at -10°		kW	3	
	Annual energy consumption			kWh/a 812	
	Required back up heating cap at design conditions			kW 0	
	Space heating (Cold climate)	Capacity	Pdesignh	kW	4.38
Energy efficiency class			A+		
SCOP/C			4.09		
SCOPnet/C			4.14		
Annual energy consumption			kWh/a 2,248		
Required back up heating cap at design conditions			kW 0.8		
Space cooling	A Condition	Pdc	kW	3	
	(35°C - 27/19)	EERd		4.89	
	Power input			kW 0.61	
	B Condition	Pdc	kW	2.22	
	(30°C - 27/19)	EERd		7.58	
	Power input			kW 0.29	
	C Condition	Pdc	kW	1.55	
	(25°C - 27/19)	EERd		10.57	
	Power input			kW 0.15	
	D Condition	Pdc	kW	1.62	
	(20°C - 27/19)	EERd		12.78	
	Power input			kW 0.13	
	Space cooling - Low sound mode (Stb. 2020, 189)	A Condition	Pdc	kW	3
		(35°C - 27/19)	EERd		4.89
		Power input			kW 0.61
		B Condition	Pdc	kW	2.22
(30°C - 27/19)		EERd		7.58	
Power input			kW 0.29		
C Condition		Pdc	kW	1.55	
(25°C - 27/19)		EERd		10.57	
Power input			kW 0.15		
D Condition		Pdc	kW	1.62	
(20°C - 27/19)		EERd		12.78	
Power input			kW 0.13		
Space heating (Average climate)		TOL	Tol (temperature operating limit)		°C -30
		TBivalent	Tbiv (bivalent temperature)		°C -10
			Pdh (declared heating cap)		kW 3
			COPd (declared COP)		3.13
	Power input		kW 0.96		
	A Condition (-7°C)	Pdh (declared heating cap)		kW 2.66	
		COPd (declared COP)		3.56	
		Power input		kW 0.75	
	B Condition (2°C)	Pdh (declared heating cap)		kW 1.62	
		COPd (declared COP)		5.21	
		Power input		kW 0.31	
	C Condition (7°C)	Pdh (declared heating cap)		kW 1.04	
	Space heating (Average climate)	C Condition (7°C)	COPd (declared COP)		6.17
			Power input		kW 0.17
		D Condition (12°C)	Pdh (declared heating cap)		kW 1.33
COPd (declared COP)			7.92		
Power input		kW 0.17			
E condition (-10°C)		Pdh (declared heating cap)		kW 3	
		COPd (declared COP)		3.13	
Power input		kW 0.96			

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30CB + RXTA30C		
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)	°C		-30	
	TBivalent	Tbiv (bivalent temperature)	°C			-10
		Pdh (declared heating cap)	kW			3
		COPd (declared COP)				3.13
		Power input	kW			0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW			2.66
		COPd (declared COP)				3.56
		Power input	kW			0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW			1.62
		COPd (declared COP)				5.21
		Power input	kW			0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW			1.04
		COPd (declared COP)				6.17
		Power input	kW			0.17
	D Condition (12°C)	Pdh (declared heating cap)	kW			1.33
COPd (declared COP)					7.92	
Power input		kW			0.17	
E condition (-10°C)	Pdh (declared heating cap)	kW			3	
	COPd (declared COP)				3.13	
	Power input	kW			0.96	
Space heating (Cold climate)	TOL	Tol (temperature operating limit)	°C		-30	
	TBivalent	Tbiv (bivalent temperature)	°C			-15
		Pdh (declared heating cap)	kW			3.58
		COPd (declared COP)				1.99
		Power input	kW			1.8
	A Condition (-7°C)	Pdh (declared heating cap)	kW			2.66
		COPd (declared COP)				3.56
		Power input	kW			0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW			1.62
	Space heating (Cold climate)	B Condition (2°C)	COPd (declared COP)			5.21
			Power input	kW		0.31
		C Condition (7°C)	Pdh (declared heating cap)	kW		1.04
		COPd (declared COP)				6.17
		Power input	kW			0.17
	D Condition (12°C)	Pdh (declared heating cap)	kW			1.33
COPd (declared COP)					7.92	
Power input		kW			0.17	
E condition (-22°C)	Pdh (declared heating cap)	kW			3.58	
	COPd (declared COP)				1.66	
	Power input	kW			2.16	
G Condition (-15°C)	Pdh (declared heating cap)	kW			3.58	
	COPd (declared COP)				1.99	
	Power input	kW			1.8	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	E condition (-10°C)	Pdh (declared heating cap)	kW		3	
		COPd (declared COP)			3.13	
		Power input	kW		0.96	
Power consumption in other than active mode	Crankcase heater mode	PCK	W		0	
	Off mode	POFF	W		1	
	Standby mode	Cooling	PSB	W		1
		Heating	PSB	W		1
	Thermostat-off mode	PTO	Cooling	W		9
Heating			W		10	
Cooling	Cdc (Degradation cooling)				0.25	
Heating	Cdh (Degradation heating)				0.25	
Cooling function included					Yes	
Heating function included					Yes	
Average climate included					Yes	
Cold season included					Yes	
Warm season included					No	
Eurovent	Piping length	Cooling	Measuring condition	m	5	

Electrical specifications				FTXTA30CB + RXTA30C	
Power factor	Nominal	Cooling	%		87.89
		Heating	%		88.67
Current	Nominal running current (RLA)	Cooling	A		2.86
		Heating	A		3.1
	Nominal running current (RLA) - 50Hz				

## 2 Specifications

### 2 - 1 Specifications

2

Electrical specifications			FTXTA30CB + RXTA30C
Current - 50Hz	Maximum fuse amps (MFA)	A	16

(1)See separate drawing for electrical data |

(2)See separate drawing for operation range |

(3)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

Technical specifications			FTXTA30CW + RXTA30C	
Cooling capacity	Min.	kW	1.2	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.6	
	Max.	Btu/h	15,700	
	Max.	kcal/h	3,955	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	1.2	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.6	
	Max.	Btu/h	15,700	
	Max.	kcal/h	3,955	
Heating capacity	Min.	kW	0.8	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.2	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.1	
	Max.	Btu/h	24,200	
	Max.	kcal/h	6,105	
Heating capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	0.8	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.2	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.1	
	Max.	Btu/h	24,200	
	Max.	kcal/h	6,105	
Power input	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Power input - Low sound mode (Stb. 2020, 189)	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Nominal efficiency	EER		4.89	
	COP		5.01	
	Annual energy consumption	kWh	307	
	Energy labeling	Cooling	A	
	Directive	Heating	A	
Nominal efficiency - Low sound mode (Stb. 2020, 189)	EER		4.89	
	COP		5.01	
	Annual energy consumption	kWh	307	
Space cooling	Energy efficiency class		A+++	
	Capacity	Pdesign	kW	3
	SEER		8.75	
	Annual energy consumption	kWh/a	120	
Space cooling - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3
	SEER		8.75	
	Annual energy consumption	kWh/a	120	
Space heating (Average climate)	Capacity	Pdesign	kW	3
	Energy efficiency class		A+++	
	SCOP/A		5.17	
	SCOPnet/A		5.18	
	Pdh Heating capacity at -10°	kW	3	
	Annual energy consumption	kWh/a	812	
	Required back up heating cap at design conditions	kW	0	

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30CW + RXTA30C
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3
	SCOP/A			5.17
	SCOPnet/A			5.18
	Pdh Heating capacity at -10°		kW	3
	Annual energy consumption		kWh/a	812
Space heating (Cold climate)	Required back up heating cap at design conditions		kW	0
	Capacity	Pdesignh	kW	4.38
	Energy efficiency class			A+
	SCOP/C			4.09
	SCOPnet/C			4.14
Space heating (Cold climate)	Annual energy consumption		kWh/a	2,248
	Required back up heating cap at design conditions		kW	0.8
Space cooling	A Condition (35°C - 27/19)	Pdc	kW	3
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space cooling - Low sound mode (Stb. 2020, 189)	A Condition (35°C - 27/19)	Pdc	kW	3
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space heating (Average climate)	TOL	Tol (temperature operating limit)	°C	-30
		Tbiv (bivalent temperature)	°C	-10
	TBivalent	Pdh (declared heating cap)	kW	3
		COPd (declared COP)		3.13
		Power input	kW	0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66
		COPd (declared COP)		3.56
		Power input	kW	0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62
		COPd (declared COP)		5.21
		Power input	kW	0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
COPd (declared COP)			6.17	
Power input		kW	0.17	
Space heating (Average climate)	D Condition (12°C)	Pdh (declared heating cap)	kW	1.33
		COPd (declared COP)		7.92
	Power input	kW	0.17	
	E condition (-10°C)	Pdh (declared heating cap)	kW	3
		COPd (declared COP)		3.13
Power input	kW	0.96		

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications				FTXTA30CW + RXTA30C			
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)	°C		-30		
	TBivalent	Tbiv (bivalent temperature)	°C			-10	
		Pdh (declared heating cap)	kW			3	
		COPd (declared COP)				3.13	
		Power input	kW			0.96	
	A Condition (-7°C)	Pdh (declared heating cap)	kW			2.66	
		COPd (declared COP)				3.56	
		Power input	kW			0.75	
	B Condition (2°C)	Pdh (declared heating cap)	kW			1.62	
		COPd (declared COP)				5.21	
		Power input	kW			0.31	
	C Condition (7°C)	Pdh (declared heating cap)	kW			1.04	
		COPd (declared COP)				6.17	
		Power input	kW			0.17	
	D Condition (12°C)	Pdh (declared heating cap)	kW			1.33	
COPd (declared COP)					7.92		
Power input		kW			0.17		
E condition (-10°C)	Pdh (declared heating cap)	kW			3		
	COPd (declared COP)				3.13		
	Power input	kW			0.96		
Space heating (Cold climate)	TOL	Tol (temperature operating limit)	°C		-30		
	TBivalent	Tbiv (bivalent temperature)	°C			-15	
		Pdh (declared heating cap)	kW			3.58	
		COPd (declared COP)				1.99	
		Power input	kW			1.8	
	A Condition (-7°C)	Pdh (declared heating cap)	kW			2.66	
		COPd (declared COP)				3.56	
		Power input	kW			0.75	
	B Condition (2°C)	Pdh (declared heating cap)	kW			1.62	
	Space heating (Cold climate)	B Condition (2°C)	COPd (declared COP)			5.21	
			Power input	kW		0.31	
		C Condition (7°C)	Pdh (declared heating cap)	kW			1.04
			COPd (declared COP)				6.17
		D Condition (12°C)	Pdh (declared heating cap)	kW			1.33
			COPd (declared COP)				7.92
E condition (-22°C)	Pdh (declared heating cap)	kW			3.58		
	COPd (declared COP)				1.66		
	Power input	kW			2.16		
G Condition (-15°C)	Pdh (declared heating cap)	kW			3.58		
	COPd (declared COP)				1.99		
	Power input	kW			1.8		
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	E condition (-10°C)	Pdh (declared heating cap)	kW		3		
		COPd (declared COP)			3.13		
		Power input	kW			0.96	
Power consumption in other than active mode	Crankcase heater mode	PCK	W		0		
		POFF	W		1		
	Standby mode	Cooling	PSB	W		1	
		Heating	PSB	W		1	
	Thermostat-off mode	PTO	Cooling	W		9	
			Heating	W		10	
Cooling	Cdc (Degradation cooling)				0.25		
Heating	Cdh (Degradation heating)				0.25		
Cooling function included					Yes		
Heating function included					Yes		
Average climate included					Yes		
Cold season included					Yes		
Warm season included					No		
Eurovent	Piping length	Cooling	Measuring condition	m	5		

Electrical specifications				FTXTA30CW + RXTA30C	
Power factor	Nominal	Cooling	%		87.89
		Heating	%		88.67
Current	Nominal running current (RLA)	Cooling	A		2.86
		Heating	A		3.1
	Nominal running current (RLA) - 50Hz				

## 2 Specifications

### 2 - 1 Specifications

Electrical specifications			FTXTA30CW + RXTA30C
Current - 50Hz	Maximum fuse amps (MFA)	A	16

(1)See separate drawing for electrical data |

(2)See separate drawing for operation range |

(3)Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4)Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

Technical specifications				FTXTA30DG + RXTA30C
Cooling capacity	Min.		kW	1.20
	Min.		Btu/h	4,100
	Min.		kcal/h	1,032
	Nom.		kW	3.00
	Nom.		Btu/h	10,200
	Nom.		kcal/h	2,580
	Max.		kW	4.60
	Max.		Btu/h	15,700
	Max.		kcal/h	3,955
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.		kW	1.20
	Min.		Btu/h	4,100
	Min.		kcal/h	1,032
	Nom.		kW	3.00
	Nom.		Btu/h	10,200
	Nom.		kcal/h	2,580
	Max.		kW	4.60
	Max.		Btu/h	15,700
	Max.		kcal/h	3,955
Heating capacity	Min.		kW	0.80
	Min.		Btu/h	2,700
	Min.		kcal/h	688
	Nom.		kW	3.20
	Nom.		Btu/h	10,900
	Nom.		kcal/h	2,752
	Max.		kW	7.10
	Max.		Btu/h	24,200
	Max.		kcal/h	6,105
Heating capacity - Low sound mode (Stb. 2020, 189)	Min.		kW	0.80
	Min.		Btu/h	2,700
	Min.		kcal/h	688
	Nom.		kW	3.20
	Nom.		Btu/h	10,900
	Nom.		kcal/h	2,752
	Max.		kW	7.10
	Max.		Btu/h	24,200
	Max.		kcal/h	6,105
Power input	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Power input - Low sound mode (Stb. 2020, 189)	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Nominal efficiency	EER			4.89
	COP			5.01
	Annual energy consumption		kWh	307
	Energy labeling Directive	Cooling Heating		A A
Nominal efficiency - Low sound mode (Stb. 2020, 189)	EER			4.89
	COP			5.01
	Annual energy consumption		kWh	307
Space cooling	Energy efficiency class			A+++
	Capacity	Pdesign	kW	3.00
	SEER			8.75
	Annual energy consumption		kWh/a	120
Space cooling - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00
	SEER			8.75
	Annual energy consumption		kWh/a	120.00
Space heating (Average climate)	Capacity	Pdesign	kW	3.00
	Energy efficiency class			A+++
	SCOP/A			5.17
	SCOPnet/A			5.18
	Pdh Heating capacity at -10°		kW	3.00
	Annual energy consumption		kWh/a	812
	Required back up heating cap at design conditions		kW	0.00

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30DG + RXTA30C	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00	
	SCOP/A			5.17	
	SCOPnet/A			5.18	
	Pdh Heating capacity at -10°		kW	3.00	
	Annual energy consumption		kWh/a	812	
Space heating (Cold climate)	Required back up heating cap at design conditions		kW	0.00	
	Capacity	Pdesignh	kW	4.38	
	Energy efficiency class			A+	
	SCOP/C			4.09	
	SCOPnet/C			4.14	
Space heating (Cold climate)	Annual energy consumption		kWh/a	2,248	
Space heating (Cold climate)	Required back up heating cap at design conditions		kW	0.80	
Space cooling	A Condition (35°C - 27/19)	Pdc	kW	3.00	
		EERd		4.89	
		Power input	kW	0.61	
	B Condition (30°C - 27/19)	Pdc	kW	2.22	
		EERd		7.58	
		Power input	kW	0.29	
	C Condition (25°C - 27/19)	Pdc	kW	1.55	
		EERd		10.57	
		Power input	kW	0.15	
	D Condition (20°C - 27/19)	Pdc	kW	1.62	
		EERd		12.78	
		Power input	kW	0.13	
Space cooling - Low sound mode (Stb. 2020, 189)	A Condition (35°C - 27/19)	Pdc	kW	3.00	
		EERd		4.89	
		Power input	kW	0.61	
	B Condition (30°C - 27/19)	Pdc	kW	2.22	
		EERd		7.58	
		Power input	kW	0.29	
	C Condition (25°C - 27/19)	Pdc	kW	1.55	
		EERd		10.57	
		Power input	kW	0.15	
	D Condition (20°C - 27/19)	Pdc	kW	1.62	
		EERd		12.78	
		Power input	kW	0.13	
Space heating (Average climate)	TOL	Tol (temperature operating limit)	°C	-30	
	TBivalent	Tbiv (bivalent temperature)	°C	-10	
		Pdh (declared heating cap)	kW	3.00	
		COPd (declared COP)		3.13	
		Power input	kW	0.96	
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66	
		COPd (declared COP)		3.56	
		Power input	kW	0.75	
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62	
		COPd (declared COP)		5.21	
		Power input	kW	0.31	
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04	
		COPd (declared COP)		6.17	
	Space heating (Average climate)	C Condition (7°C)	Power input	kW	0.17
			D Condition (12°C)	Pdh (declared heating cap)	kW
D Condition (12°C)		COPd (declared COP)		7.92	
		Power input	kW	0.17	
E condition (-10°C)		Pdh (declared heating cap)	kW	3.00	
		COPd (declared COP)		3.13	
		Power input	kW	0.96	

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30DG + RXTA30C	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)	°C	-30.00	
	TBivalent	Tbiv (bivalent temperature)	°C	-10.00	
		Pdh (declared heating cap)	kW	3.00	
		COPd (declared COP)		3.13	
		Power input	kW	0.96	
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66	
		COPd (declared COP)		3.56	
		Power input	kW	0.75	
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62	
		COPd (declared COP)		5.21	
		Power input	kW	0.31	
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04	
		COPd (declared COP)		6.17	
		Power input	kW	0.17	
	D Condition (12°C)	Pdh (declared heating cap)	kW	1.33	
COPd (declared COP)			7.92		
Power input		kW	0.17		
E condition (-10°C)	Pdh (declared heating cap)	kW	3.00		
	COPd (declared COP)		3.13		
	Power input	kW	0.96		
Space heating (Cold climate)	TOL	Tol (temperature operating limit)	°C	-30	
	TBivalent	Tbiv (bivalent temperature)	°C	-15	
		Pdh (declared heating cap)	kW	3.58	
		COPd (declared COP)		1.99	
		Power input	kW	1.80	
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66	
		COPd (declared COP)		3.56	
		Power input	kW	0.75	
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62	
	Space heating (Cold climate)	B Condition (2°C)	COPd (declared COP)		5.21
			Power input	kW	0.31
		C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
		COPd (declared COP)		6.17	
		Power input	kW	0.17	
	D Condition (12°C)	Pdh (declared heating cap)	kW	1.33	
COPd (declared COP)			7.92		
Power input		kW	0.17		
E condition (-22°C)	Pdh (declared heating cap)	kW	3.58		
	COPd (declared COP)		1.66		
	Power input	kW	2.16		
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	E condition (-10°C)	Pdh (declared heating cap)	kW	3.00	
		COPd (declared COP)		3.13	
		Power input	kW	0.96	
Power consumption in other than active mode	Crankcase heater mode	PCK	W	0	
		POFF	W	1	
	Standby mode	Cooling PSB	W	1	
		Heating PSB	W	1	
	Thermo-stat-off mode	PTO	Cooling Heating	W W	9 10
Cooling	Cdc (Degradation cooling)			0.25	
Heating	Cdh (Degradation heating)			0.25	
Cooling function included				Yes	
Heating function included				Yes	
Average climate included				Yes	
Cold season included				Yes	
Warm season included				No	
Eurovent	Piping length	Cooling	Measuring condition	m	5.00

Electrical specifications				FTXTA30DG + RXTA30C
Power factor	Nominal	Cooling	%	87.89
		Heating	%	88.67
Current	Nominal running current (RLA)	Cooling	A	2.86
		Heating	A	3.10
Current - 50Hz	Maximum fuse amps (MFA)		A	16.00

(1)See separate drawing for electrical data |

(2)See separate drawing for operation range |

## 2 Specifications

### 2 - 1 Specifications

(3) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

2

Technical specifications			FTXTA30DL + RXTA30C	
Cooling capacity	Min.	kW	1.20	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3.00	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.60	
	Max.	Btu/h	15,700	
	Max.	kcal/h	3,955	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	1.20	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3.00	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.60	
	Max.	Btu/h	15,700	
	Max.	kcal/h	3,955	
Heating capacity	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.10	
	Max.	Btu/h	24,200	
	Max.	kcal/h	6,105	
Heating capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.10	
	Max.	Btu/h	24,200	
	Max.	kcal/h	6,105	
Power input	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Power input - Low sound mode (Stb. 2020, 189)	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Nominal efficiency	EER		4.89	
	COP		5.01	
	Annual energy consumption	kWh	307	
	Energy labeling Directive	Cooling Heating	A A	
Nominal efficiency - Low sound mode (Stb. 2020, 189)	EER		4.89	
	COP		5.01	
	Annual energy consumption	kWh	307	
	Energy efficiency class		A+++	
Space cooling	Capacity	Pdesign	kW	3.00
	SEER		8.75	
	Annual energy consumption	kWh/a	120	
	Capacity	Pdesign	kW	3.00
Space cooling - Low sound mode (Stb. 2020, 189)	SEER		8.75	
	Annual energy consumption	kWh/a	120.00	
	Capacity	Pdesign	kW	3.00
	Energy efficiency class		A+++	
Space heating (Average climate)	SCOP/A		5.17	
	SCOPnet/A		5.18	
	Pdh Heating capacity at -10°	kW	3.00	
	Annual energy consumption	kWh/a	812	
	Required back up heating cap at design conditions	kW	0.00	
	Capacity	Pdesign	kW	3.00
	SCOP/A		5.17	
	SCOPnet/A		5.18	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Pdh Heating capacity at -10°	kW	3.00	
	Annual energy consumption	kWh/a	812	
	Required back up heating cap at design conditions	kW	0.00	

# 2 Specifications

## 2 - 1 Specifications

Technical specifications				FTXTA30DL + RXTA30C	
Space heating (Cold climate)	Capacity	Pdesignh	kW	4.38	
	Energy efficiency class			A+	
	SCOP/C			4.09	
	SCOPnet/C			4.14	
	Annual energy consumption			kWh/a 2,248	
Space heating (Cold climate)	Required back up heating cap at design conditions		kW	0.80	
Space cooling	A Condition (35°C - 27/19)	Pdc	kW	3.00	
		EERd		4.89	
		Power input	kW	0.61	
	B Condition (30°C - 27/19)	Pdc	kW	2.22	
		EERd		7.58	
		Power input	kW	0.29	
	C Condition (25°C - 27/19)	Pdc	kW	1.55	
		EERd		10.57	
		Power input	kW	0.15	
	D Condition (20°C - 27/19)	Pdc	kW	1.62	
		EERd		12.78	
		Power input	kW	0.13	
Space cooling - Low sound mode (Stb. 2020, 189)	A Condition (35°C - 27/19)	Pdc	kW	3.00	
		EERd		4.89	
		Power input	kW	0.61	
	B Condition (30°C - 27/19)	Pdc	kW	2.22	
		EERd		7.58	
		Power input	kW	0.29	
	C Condition (25°C - 27/19)	Pdc	kW	1.55	
		EERd		10.57	
		Power input	kW	0.15	
	D Condition (20°C - 27/19)	Pdc	kW	1.62	
		EERd		12.78	
		Power input	kW	0.13	
Space heating (Average climate)	TOL	Tol (temperature operating limit)		°C -30	
	TBivalent	Tbiv (bivalent temperature)		°C -10	
		Pdh (declared heating cap)		kW 3.00	
		COPd (declared COP)		3.13	
		Power input		kW 0.96	
	A Condition (-7°C)	Pdh (declared heating cap)		kW 2.66	
		COPd (declared COP)		3.56	
		Power input		kW 0.75	
	B Condition (2°C)	Pdh (declared heating cap)		kW 1.62	
		COPd (declared COP)		5.21	
		Power input		kW 0.31	
	C Condition (7°C)	Pdh (declared heating cap)		kW 1.04	
	Space heating (Average climate)	C Condition (7°C)	COPd (declared COP)		6.17
			Power input		kW 0.17
D Condition (12°C)		Pdh (declared heating cap)		kW 1.33	
		COPd (declared COP)		7.92	
E condition (-10°C)		Pdh (declared heating cap)		kW 3.00	
		COPd (declared COP)		3.13	
Power input		kW 0.96			
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)		°C -30.00	
	TBivalent	Tbiv (bivalent temperature)		°C -10.00	
		Pdh (declared heating cap)		kW 3.00	
		COPd (declared COP)		3.13	
		Power input		kW 0.96	
	A Condition (-7°C)	Pdh (declared heating cap)		kW 2.66	
		COPd (declared COP)		3.56	
		Power input		kW 0.75	
	B Condition (2°C)	Pdh (declared heating cap)		kW 1.62	
		COPd (declared COP)		5.21	
		Power input		kW 0.31	
	C Condition (7°C)	Pdh (declared heating cap)		kW 1.04	
		COPd (declared COP)		6.17	
		Power input		kW 0.17	
	D Condition (12°C)	Pdh (declared heating cap)		kW 1.33	
COPd (declared COP)		7.92			
Power input		kW 0.17			
E condition (-10°C)	Pdh (declared heating cap)		kW 3.00		
	COPd (declared COP)		3.13		
	Power input		kW 0.96		

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications				FTXTA30DL + RXTA30C	
Space heating (Cold climate)	TOL	Tol (temperature operating limit) °C		-30	
		TBivalent	Tbiv (bivalent temperature) °C		-15
	Pdh (declared heating cap) kW		3.58		
	COPd (declared COP)		1.99		
	Power input kW		1.80		
	A Condition (-7°C)	Pdh (declared heating cap) kW		2.66	
		COPd (declared COP)		3.56	
		Power input kW		0.75	
	B Condition (2°C)	Pdh (declared heating cap) kW		1.62	
	Space heating (Cold climate)	B Condition (2°C)	COPd (declared COP)		5.21
Power input kW			0.31		
C Condition (7°C)		Pdh (declared heating cap) kW		1.04	
		COPd (declared COP)		6.17	
		Power input kW		0.17	
D Condition (12°C)		Pdh (declared heating cap) kW		1.33	
		COPd (declared COP)		7.92	
		Power input kW		0.17	
E condition (-22°C)		Pdh (declared heating cap) kW		3.58	
		COPd (declared COP)		1.66	
		Power input kW		2.16	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)		E condition (-10°C)	Pdh (declared heating cap) kW		3.00
	COPd (declared COP)		3.13		
	Power input kW		0.96		
Power consumption in other than active mode	Crankcase heater mode	PCK		W	0
		Off mode		POFF	W
	Standby mode	Cooling	PSB	W	1
		Heating	PSB	W	1
	Thermo-stat-off mode	PTO	Cooling	W	9
Heating			W	10	
Cooling	Cdc (Degradation cooling)			0.25	
Heating	Cdh (Degradation heating)			0.25	
Cooling function included				Yes	
Heating function included				Yes	
Average climate included				Yes	
Cold season included				Yes	
Warm season included				No	
Eurovent	Piping length	Cooling	Measuring condition	m	5.00

Electrical specifications				FTXTA30DL + RXTA30C
Power factor	Nominal	Cooling	%	87.89
		Heating	%	88.67
Current	Nominal running current (RLA)	Cooling	A	2.86
		Heating	A	3.10
Current - 50Hz	Maximum fuse amps (MFA)		A	16.00

(1) See separate drawing for electrical data |

(2) See separate drawing for operation range |

(3) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

Technical specifications				FTXTA30DP + RXTA30C	
Cooling capacity	Min.			kW	1.20
	Min.			Btu/h	4,100
	Min.			kcal/h	1,032
	Nom.			kW	3.00
	Nom.			Btu/h	10,200
	Nom.			kcal/h	2,580
	Max.			kW	4.60
	Max.			Btu/h	15,700
	Max.			kcal/h	3,955

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXTA30DP + RXTA30C	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	1.20	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3.00	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.60	
	Max.	Btu/h	15,700	
Heating capacity	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.10	
	Max.	Btu/h	24,200	
Heating capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.10	
	Max.	Btu/h	24,200	
Power input	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Power input - Low sound mode (Stb. 2020, 189)	Cooling	Nom.	kW	0.61
	Heating	Nom.	kW	0.64
Nominal efficiency	EER			4.89
	COP			5.01
	Annual energy consumption		kWh	307
	Energy labeling	Cooling		A
	Directive	Heating		A
Nominal efficiency - Low sound mode (Stb. 2020, 189)	EER			4.89
	COP			5.01
	Annual energy consumption		kWh	307
Space cooling	Energy efficiency class			A+++
	Capacity	Pdesign	kW	3.00
	SEER			8.75
	Annual energy consumption		kWh/a	120
Space cooling - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00
	SEER			8.75
	Annual energy consumption		kWh/a	120.00
Space heating (Average climate)	Capacity	Pdesign	kW	3.00
	Energy efficiency class			A+++
	SCOP/A			5.17
	SCOPnet/A			5.18
	Pdh Heating capacity at -10°		kW	3.00
	Annual energy consumption		kWh/a	812
	Required back up heating cap at design conditions		kW	0.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00
	SCOP/A			5.17
	SCOPnet/A			5.18
	Pdh Heating capacity at -10°		kW	3.00
	Annual energy consumption		kWh/a	812
	Required back up heating cap at design conditions		kW	0.00
	Space heating (Cold climate)	Capacity	Pdesignh	kW
Energy efficiency class				A+
SCOP/C				4.09
SCOPnet/C				4.14
Annual energy consumption			kWh/a	2,248
Space heating (Cold climate)	Required back up heating cap at design conditions		kW	0.80

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXTA30DP + RXTA30C	
Space cooling	A Condition (35°C - 27/19)	Pdc	kW	3.00
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space cooling - Low sound mode (Stb. 2020, 189)	A Condition (35°C - 27/19)	Pdc	kW	3.00
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space heating (Average climate)	TOL	Tol (temperature operating limit)	°C	-30
		Tbiv (bivalent temperature)	°C	-10
	TBivalent	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66
		COPd (declared COP)		3.56
		Power input	kW	0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62
		COPd (declared COP)		5.21
		Power input	kW	0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
COPd (declared COP)			6.17	
Power input		kW	0.17	
Space heating (Average climate)	D Condition (12°C)	Pdh (declared heating cap)	kW	1.33
		COPd (declared COP)		7.92
		Power input	kW	0.17
	E condition (-10°C)	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)	°C	-30.00
		Tbiv (bivalent temperature)	°C	-10.00
	TBivalent	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66
		COPd (declared COP)		3.56
		Power input	kW	0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62
		COPd (declared COP)		5.21
		Power input	kW	0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
COPd (declared COP)			6.17	
Power input		kW	0.17	
D Condition (12°C)	Pdh (declared heating cap)	kW	1.33	
	COPd (declared COP)		7.92	
	Power input	kW	0.17	
E condition (-10°C)	Pdh (declared heating cap)	kW	3.00	
	COPd (declared COP)		3.13	
	Power input	kW	0.96	

## 2 Specifications

### 2 - 1 Specifications

Technical specifications				FTXTA30DP + RXTA30C	
Space heating (Cold climate)	TOL	Tol (temperature operating limit) °C		-30	
		TBivalent	Tbiv (bivalent temperature) °C		-15
	Pd <sub>h</sub> (declared heating cap) kW		3.58		
	COP <sub>d</sub> (declared COP)		1.99		
	Power input kW		1.80		
	A Condition (-7°C)	Pd <sub>h</sub> (declared heating cap) kW		2.66	
		COP <sub>d</sub> (declared COP)		3.56	
		Power input kW		0.75	
B Condition (2°C)	Pd <sub>h</sub> (declared heating cap) kW		1.62		
Space heating (Cold climate)	B Condition (2°C)	COP <sub>d</sub> (declared COP)		5.21	
		Power input kW		0.31	
	C Condition (7°C)	Pd <sub>h</sub> (declared heating cap) kW		1.04	
		COP <sub>d</sub> (declared COP)		6.17	
		Power input kW		0.17	
	D Condition (12°C)	Pd <sub>h</sub> (declared heating cap) kW		1.33	
		COP <sub>d</sub> (declared COP)		7.92	
		Power input kW		0.17	
	E condition (-22°C)	Pd <sub>h</sub> (declared heating cap) kW		3.58	
		COP <sub>d</sub> (declared COP)		1.66	
		Power input kW		2.16	
	Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	E condition (-10°C)	Pd <sub>h</sub> (declared heating cap) kW		3.00
COP <sub>d</sub> (declared COP)			3.13		
Power input kW		0.96			
Power consumption in other than active mode	Crankcase heater mode	PCK	W	0	
	Off mode	POFF	W	1	
	Standby mode	Cooling	PSB	W	1
		Heating	PSB	W	1
	Thermo-stat-off mode	PTO	Cooling	W	9
Heating			W	10	
Cooling	Cdc (Degradation cooling)		0.25		
Heating	Cdh (Degradation heating)		0.25		
Cooling function included				Yes	
Heating function included				Yes	
Average climate included				Yes	
Cold season included				Yes	
Warm season included				No	
Eurovent	Piping length	Cooling	Measuring condition m	5.00	

Electrical specifications				FTXTA30DP + RXTA30C
Power factor	Nominal	Cooling	%	87.89
		Heating	%	88.67
Current	Nominal running current (RLA)	Cooling	A	2.86
		Heating	A	3.10
Current - 50Hz	Maximum fuse amps (MFA)		A	16.00

(1) See separate drawing for electrical data |

(2) See separate drawing for operation range |

(3) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

Technical specifications				FTXTA30DY + RXTA30C
Cooling capacity	Min.	kW		1.20
	Min.	Btu/h		4,100
	Min.	kcal/h		1,032
	Nom.	kW		3.00
	Nom.	Btu/h		10,200
	Nom.	kcal/h		2,580
	Max.	kW		4.60
	Max.	Btu/h		15,700
	Max.	kcal/h		3,955

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications			FTXTA30DY + RXTA30C	
Cooling capacity - Low sound mode (Stb. 2020, 189)	Min.	kW	1.20	
	Min.	Btu/h	4,100	
	Min.	kcal/h	1,032	
	Nom.	kW	3.00	
	Nom.	Btu/h	10,200	
	Nom.	kcal/h	2,580	
	Max.	kW	4.60	
	Max.	Btu/h	15,700	
Heating capacity	Max.	kcal/h	3,955	
	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
	Max.	kW	7.10	
Heating capacity - Low sound mode (Stb. 2020, 189)	Max.	Btu/h	24,200	
	Max.	kcal/h	6,105	
	Min.	kW	0.80	
	Min.	Btu/h	2,700	
	Min.	kcal/h	688	
	Nom.	kW	3.20	
	Nom.	Btu/h	10,900	
	Nom.	kcal/h	2,752	
Power input	Max.	kW	7.10	
	Max.	Btu/h	24,200	
Power input - Low sound mode (Stb. 2020, 189)	Max.	kcal/h	6,105	
	Cooling	Nom.	kW	0.61
Nominal efficiency	Heating	Nom.	kW	0.64
	Cooling	Nom.	kW	0.61
Nominal efficiency - Low sound mode (Stb. 2020, 189)	Heating	Nom.	kW	0.64
	EER			4.89
Space cooling	COP			5.01
	Annual energy consumption	kWh		307
Space cooling - Low sound mode (Stb. 2020, 189)	Energy efficiency class			A
	labeling	Cooling		A
Space heating (Average climate)	labeling	Heating		A
	Directive			
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	EER			4.89
	COP			5.01
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Annual energy consumption	kWh		307
	Capacity	Pdesign	kW	3.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	SEER			8.75
	Annual energy consumption	kWh/a		120
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00
	SEER			8.75
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Annual energy consumption	kWh/a		120.00
	Capacity	Pdesign	kW	3.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Energy efficiency class			A+++
	SCOP/A			5.17
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	SCOPnet/A			5.18
	Pdh Heating capacity at -10°	kW		3.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Annual energy consumption	kWh/a		812
	Required back up heating cap at design conditions	kW		0.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Capacity	Pdesign	kW	3.00
	SCOP/A			5.17
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	SCOPnet/A			5.18
	Pdh Heating capacity at -10°	kW		3.00
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	Annual energy consumption	kWh/a		812
	Required back up heating cap at design conditions	kW		0.00
Space heating (Cold climate)	Capacity	Pdesignh	kW	4.38
	Energy efficiency class			A+
Space heating (Cold climate)	SCOP/C			4.09
	SCOPnet/C			4.14
Space heating (Cold climate)	Annual energy consumption	kWh/a		2,248
	Required back up heating cap at design conditions	kW		0.80

## 2 Specifications

### 2 - 1 Specifications

Technical specifications			FTXTA30DY + RXTA30C	
Space cooling	A Condition (35°C - 27/19)	Pdc	kW	3.00
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space cooling - Low sound mode (Stb. 2020, 189)	A Condition (35°C - 27/19)	Pdc	kW	3.00
		EERd		4.89
		Power input	kW	0.61
	B Condition (30°C - 27/19)	Pdc	kW	2.22
		EERd		7.58
		Power input	kW	0.29
	C Condition (25°C - 27/19)	Pdc	kW	1.55
		EERd		10.57
		Power input	kW	0.15
	D Condition (20°C - 27/19)	Pdc	kW	1.62
		EERd		12.78
		Power input	kW	0.13
Space heating (Average climate)	TOL	Tol (temperature operating limit)	°C	-30
		Tbiv (bivalent temperature)	°C	-10
	TBivalent	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66
		COPd (declared COP)		3.56
		Power input	kW	0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62
		COPd (declared COP)		5.21
		Power input	kW	0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
COPd (declared COP)			6.17	
Power input		kW	0.17	
Space heating (Average climate)	D Condition (12°C)	Pdh (declared heating cap)	kW	1.33
		COPd (declared COP)		7.92
		Power input	kW	0.17
	E condition (-10°C)	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	TOL	Tol (temperature operating limit)	°C	-30.00
		Tbiv (bivalent temperature)	°C	-10.00
	TBivalent	Pdh (declared heating cap)	kW	3.00
		COPd (declared COP)		3.13
		Power input	kW	0.96
	A Condition (-7°C)	Pdh (declared heating cap)	kW	2.66
		COPd (declared COP)		3.56
		Power input	kW	0.75
	B Condition (2°C)	Pdh (declared heating cap)	kW	1.62
		COPd (declared COP)		5.21
		Power input	kW	0.31
	C Condition (7°C)	Pdh (declared heating cap)	kW	1.04
COPd (declared COP)			6.17	
Power input		kW	0.17	
D Condition (12°C)	Pdh (declared heating cap)	kW	1.33	
	COPd (declared COP)		7.92	
	Power input	kW	0.17	
E condition (-10°C)	Pdh (declared heating cap)	kW	3.00	
	COPd (declared COP)		3.13	
	Power input	kW	0.96	

## 2 Specifications

### 2 - 1 Specifications

2

Technical specifications				FTXTA30DY + RXTA30C
Space heating (Cold climate)	TOL	Tol (temperature operating limit) °C		-30
		TBivalent	Tbiv (bivalent temperature) °C	
	Pd <sub>h</sub> (declared heating cap) kW		3.58	
	COP <sub>d</sub> (declared COP)		1.99	
	Power input kW		1.80	
	A Condition (-7°C)	Pd <sub>h</sub> (declared heating cap) kW		2.66
		COP <sub>d</sub> (declared COP)		3.56
		Power input kW		0.75
	B Condition (2°C)	Pd <sub>h</sub> (declared heating cap) kW		1.62
	Space heating (Cold climate)	B Condition (2°C)	COP <sub>d</sub> (declared COP)	
Power input kW			0.31	
C Condition (7°C)		Pd <sub>h</sub> (declared heating cap) kW		1.04
		COP <sub>d</sub> (declared COP)		6.17
		Power input kW		0.17
D Condition (12°C)		Pd <sub>h</sub> (declared heating cap) kW		1.33
		COP <sub>d</sub> (declared COP)		7.92
		Power input kW		0.17
E condition (-22°C)		Pd <sub>h</sub> (declared heating cap) kW		3.58
		COP <sub>d</sub> (declared COP)		1.66
	Power input kW		2.16	
Space heating (Average climate) - Low sound mode (Stb. 2020, 189)	E condition (-10°C)	Pd <sub>h</sub> (declared heating cap) kW		3.00
		COP <sub>d</sub> (declared COP)		3.13
		Power input kW		0.96
Power consumption in other than active mode	Crankcase heater mode	PCK W		0
		Off mode POFF W		1
	Standby mode	Cooling PSB	W	1
		Heating PSB	W	1
	Thermo-stat-off mode	PTO	Cooling	W
Heating			W	10
Cooling	Cdc (Degradation cooling)		0.25	
Heating	Cdh (Degradation heating)		0.25	
Cooling function included				Yes
Heating function included				Yes
Average climate included				Yes
Cold season included				Yes
Warm season included				No
Eurovent	Piping length	Cooling	Measuring condition m	5.00

Electrical specifications				FTXTA30DY + RXTA30C
Power factor	Nominal	Cooling	%	87.89
		Heating	%	88.67
Current	Nominal running current (RLA)	Cooling	A	2.86
			Nominal running current (RLA) - 50Hz	Heating
Current - 50Hz	Maximum fuse amps (MFA)			A

(1) See separate drawing for electrical data |

(2) See separate drawing for operation range |

(3) Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. |

(4) Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m.

Technical Specifications				RXTA30C	
Refrigerant	Charge		tCO <sub>2</sub> Eq	0.66	
Casing	Colour			Ivory white	
Dimensions	Unit	Height	mm	605	
		Width	mm	930	
		Depth	mm	376	
	Packed unit	Height	mm	662	
		Width	mm	991	
		Depth	mm	435	
Weight	Unit			kg	42
	Packed unit			kg	45
Packing	Weight		kg	3	

## 2 Specifications

### 2 - 1 Specifications

Technical Specifications					RXTA30C	
Heat exchanger	Length		mm		889	
	Rows	Quantity			2	
	Fin pitch		mm		1.4	
	Stages	Quantity			26	
	Passes	Quantity			4.3	
	Tube type				7.0 Hi-XD	
	Tube diameter		mm		7	
	Fin	Type			Waffle fin (PE)	
Fan	Type				Propeller fan	
	Air flow rate	Cooling	High	m <sup>3</sup> /min	41.5	
				cfm	1,466	
			Nom.	m <sup>3</sup> /min	41.5	
		cfm	1,466			
		Medium	m <sup>3</sup> /min	38.0		
		cfm	1,342			
	Low	m <sup>3</sup> /min	38.0			
		cfm	1,342			
		Silent operation	m <sup>3</sup> /min	38.0		
	cfm	1,342				
	Heating	High	m <sup>3</sup> /min	41.5		
			cfm	1,466		
Nom.		m <sup>3</sup> /min	32.9			
cfm		1,162				
Medium		m <sup>3</sup> /min	32.9			
cfm		1,162				
Fan	Air flow rate	Heating	Low	m <sup>3</sup> /min	17.6	
				cfm	622	
			Silent operation	m <sup>3</sup> /min	17.6	
cfm	622					
Fan motor	Model				DFC09A2VA	
	Output		W		90	
	Speed	Cooling	High	rpm	870	
				Nom.	rpm	870
			Medium	rpm	800	
			Low	rpm	800	
		Super low	rpm	800		
		Heating	High	rpm	870	
				Nom.	rpm	700
			Low	rpm	400	
	Super low		rpm	400		
	Medium	rpm	700			
Compressor	Model				2Y147BKCX1P#D	
	Oil Amount		cm <sup>3</sup>		430	
	Type				Hermetically sealed swing compressor	
	Output		W		1,300	
Operation range	Cooling	Ambient	Min.	°CDB	-10	
			Max.	°CDB	46	
		Heating	Ambient	Min.	°CWB	-31
				Max.	°CWB	-30
				°CWB	18	
				°CDB	24	
	Sound power level	Cooling	Nom.		dBA	60.0
		Heating	Nom.		dBA	60.0
Sound power level - Low sound mode (Stb. 2020, 189)	Cooling	Max.		dBA	60	
		Night quiet mode		dBA	55.0	
	Heating	Max.		dBA	60	
		Night quiet mode		dBA	55.0	
		Tonal adjustment		dBA	0	
Sound pressure level	Cooling	Nom.		dBA	48	
	Heating	Nom.		dBA	49.0	
Refrigerant	Type				R-32	
Refrigerant	Charge		kg		0.97	
	Charge		tCO <sub>2</sub> Eq		0.66	
	Control				Expansion valve	
	GWP					675.0

## 2 Specifications

### 2 - 1 Specifications

2

Technical Specifications				RXTA30C
Piping connections	Liquid	OD	mm	6.35
	Gas	OD	mm	9.5
	Drain	OD	mm	18
	Piping length	OU - IU	Max. m	20
	Additional refrigerant charge			0.02 (for piping length exceeding 10m)
	Level difference	IU - OU	Max. m	15.0
	Heat insulation			Both liquid and gas pipes
Capacity control	Method			Inverter controlled

Standard accessories: Installation manual;Quantity: 1;

Standard accessories: Refrigerant charge label;Quantity: 1;

Standard accessories: Multilingual fluorinated greenhouse gases labels;Quantity: 1;

Electrical Specifications				RXTA30C
Power supply	Phase			1~
	Frequency			50
	Voltage			220-240
Wiring connections	For power supply	Quantity		3
		Remark		Earth wire included
	For connection with indoor	Quantity		4
		Remark		Earth wire included
Current - 50Hz	Maximum fuse amps (MFA)	Maximum fuse amps (MFA)	A	16

(1)Contains fluorinated greenhouse gases |

(2)See separate drawing for operation range |

(3)See separate drawing for electrical data

# 3 Electrical data

## 3 - 1 Electrical Data

**RXTA-C**

Unit combination restrictions		Power supply				COMP		OFM		IFM		
Indoor unit	Outdoor unit	Hz	Voltage	Voltage range	MCA	MFA	RHz	RLA	kW	FLA	kW	FLA
FTXTM30S2V1B	RXTM30A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,72	16	34	3,1	0,049	0,58	0,034	0,30
		50	230					3,0				
		50	240					2,9				
FTXTM40S2V1B	RXTM40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	15,05	16	44	2,9	0,049	0,58	0,052	0,60
		50	230					2,8				
		50	240					2,7				
FTXTJ30A2V1BW FTXTJ30A2V1BB	RXTJ30A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,66	16	36	3,3	0,049	0,58	0,029	0,25
		50	230					3,2				
		50	240					3,1				
FTXTA30C2V1BW FTXTA30C2V1BB	RXTA30C2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,83	16	36	3,3	0,049	0,58	0,041	0,40
		50	230					3,2				
		50	240					3,1				
FTXTA30D2V1BG/ P/L/Y	RXTA30C2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,83	16	36	3,1	0,049	0,58	0,041	0,40
		50	230					3,2				
		50	240					3,1				
FVXTM30A3V1B FVXTM30B2V1B	RXTM30A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,54	16	36	3,1	0,049	0,58	0,037	0,14
		50	230					3,0				
		50	240					2,9				
FTXTP25N5V1B	RXTP25A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,88	16	34	3,5	0,049	0,58	0,037	0,45
		50	230					3,3				
		50	240					3,2				
FTXTP35N5V1B	RXTP35A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,88	16	44	4,7	0,049	0,58	0,037	0,45
		50	230					4,5				
		50	240					4,3				
FTXTM30A2V1B	RXTM30A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,73	16	32	3,1	0,049	0,58	0,033	0,31
		50	230					3				
		50	240					2,9				
FTXTM40A2V1B	RXTM40A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	15,05	16	44	4	0,049	0,58	0,052	0,6
		50	230					3,8				
		50	240					3,6				
ATXTM30A2V1B	ARXTM30A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,73	16	32	3,1	0,049	0,58	0,033	0,31
		50	230					3				
		50	240					2,9				
FTXTP25A5V1B	RXTP25A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,88	16	26	3,5	0,049	0,58	0,037	0,45
		50	230					3,2				
		50	240					3,1				
FTXTP35A5V1B	RXTP35A2V1B	50	220	MAX. 50Hz 264V MIN. 50Hz 198V	14,88	16	40	4,6	0,049	0,58	0,037	0,45
		50	230					4,4				
		50	240					4,2				

Symbols

- MCA: Minimum Circuit Amperes [A]
- MFA: Maximum Fuse Amperes [A]
- RLA: Rated Load Amperes [A]
- OFM: Outdoor fan motor
- IFM: Indoor fan motor
- RHz: Rated operating frequency [Hz]
- FLA: Full Load Amperes [A]
- kW: Fan motor rated output [kW]
- COMP: Compressor

Notes

- 1) The -RLA- is based on the following conditions.  
Outdoor temperature :35°C DB  
Indoor temperature :27°C DB / -19°C WB
- 2) Select the wire size according to the MCA.
- 3) The maximum allowable voltage that is unbalanced between phases is -2%.
- 4) Use a circuit breaker instead of a fuse.

**4D147511C**

# 4 Capacity tables

## 4 - 1 Cooling/Heating Capacity Tables

FTXTA-C(B/W) + RXTA-C

FTXTA-D(B/G/P/L/Y) + RXTA-C

4

AFR	13,1
BF	0,20

Cooling -50Hz 220-240V-

Indoor air temperature		Outdoor temperature [°C DB]																	
		20			25			30			32			35			40		
[°C WB]	[°C DB]	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI	TC	SHC	PI
14	20	3,13	2,41	0,47	2,99	2,37	0,52	2,85	2,33	0,56	2,80	2,32	0,58	2,65	2,31	0,61	2,57	2,30	0,65
16	22	3,27	2,29	0,47	3,13	2,24	0,52	2,99	2,20	0,56	2,94	2,19	0,58	2,79	2,16	0,61	2,71	2,15	0,66
18	25	3,41	2,42	0,48	3,27	2,39	0,52	3,13	2,37	0,57	3,07	2,36	0,59	2,93	2,36	0,61	2,85	2,36	0,66
<b>19</b>	<b>27</b>	3,48	2,64	0,48	3,34	2,63	0,52	3,20	2,64	0,57	3,14	2,65	0,59	<b>3,00</b>	<b>2,69</b>	<b>0,61</b>	2,92	2,72	0,66
22	30	3,69	2,37	0,48	3,55	2,35	0,53	3,41	2,34	0,57	3,35	2,34	0,59	3,21	2,34	0,62	3,13	2,35	0,66
24	32	3,82	2,21	0,48	3,68	2,19	0,53	3,55	2,17	0,58	3,49	2,16	0,59	3,35	2,15	0,62	3,27	2,16	0,67

AFR	12,3
-----	------

Heating -50Hz 220-240V-

Indoor air temperature		Outdoor temperature [°C WB]																	
		-25		-20		-15		-10		-5		0		6		10			
[°C DB]		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
15		1,21	0,45	1,53	0,48	1,85	0,50	2,23	0,53	2,59	0,56	2,91	0,59	3,36	0,62	3,60	0,64		
<b>20</b>		1,05	0,46	1,37	0,49	1,70	0,52	2,06	0,55	2,43	0,57	2,75	0,60	<b>3,20</b>	<b>0,64</b>	3,44	0,66		
22		0,99	0,47	1,31	0,50	1,64	0,52	2,00	0,55	2,37	0,58	2,69	0,61	3,14	0,65	3,38	0,66		
24		0,92	0,48	1,24	0,50	1,58	0,53	1,93	0,56	2,30	0,59	2,62	0,61	3,07	0,66	3,31	0,67		
25		0,89	0,48	1,21	0,51	1,55	0,53	1,90	0,56	2,27	0,59	2,59	0,62	3,04	0,66	3,28	0,67		
27		0,83	0,48	1,15	0,51	1,49	0,54	1,83	0,57	2,21	0,59	2,53	0,62	2,98	0,66	3,22	0,68		

Heating capacity at nominal operating frequency, measured according to 'EN14511'.

Indoor air temperature		Outdoor temperature [°C WB]																	
		-25		-20		-15		-10		-5		0		6		10			
[°C DB]		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
<b>20</b>		3,70	2,23	4,30	2,37	4,80	2,52	5,30	2,58	5,60	2,61	6,01	2,64	7,10	2,67	7,37	2,70		

Heating peak capacity at maximum operating frequency

Symbols

- AFR Air flow rate [m<sup>3</sup>/min]
- BF Bypass factor
- °C WB Wet-bulb temperature [°C WB]
- °C DB Dry-bulb temperature [°C DB]
- TC Total capacity [kW]
- SHC Sensible heat capacity [kW]
- PI Power input [kW]

Notes


1. The ratings shown are net capacities which include a deduction for indoor fan motor heat.
2. The bold cells indicate the standard conditions.
3. The total capacity, power input and sensible heat capacity must be calculated by interpolation, using the figures in the table (figures not in the table may not be used in the calculation).
4. In case the sensible heat capacity is not mentioned in the table, please calculate it using an approximation between two values in direct proportion.
5. The capacities are based on the following conditions:  
Corresponding refrigerant piping length: -5 m  
Level difference: 0 m
6. The air flow rate and bypass factor are mentioned in the table.

**4D148021C**

# 5 Dimensional drawings

## 5 - 1 Dimensional Drawings

RXTA-C

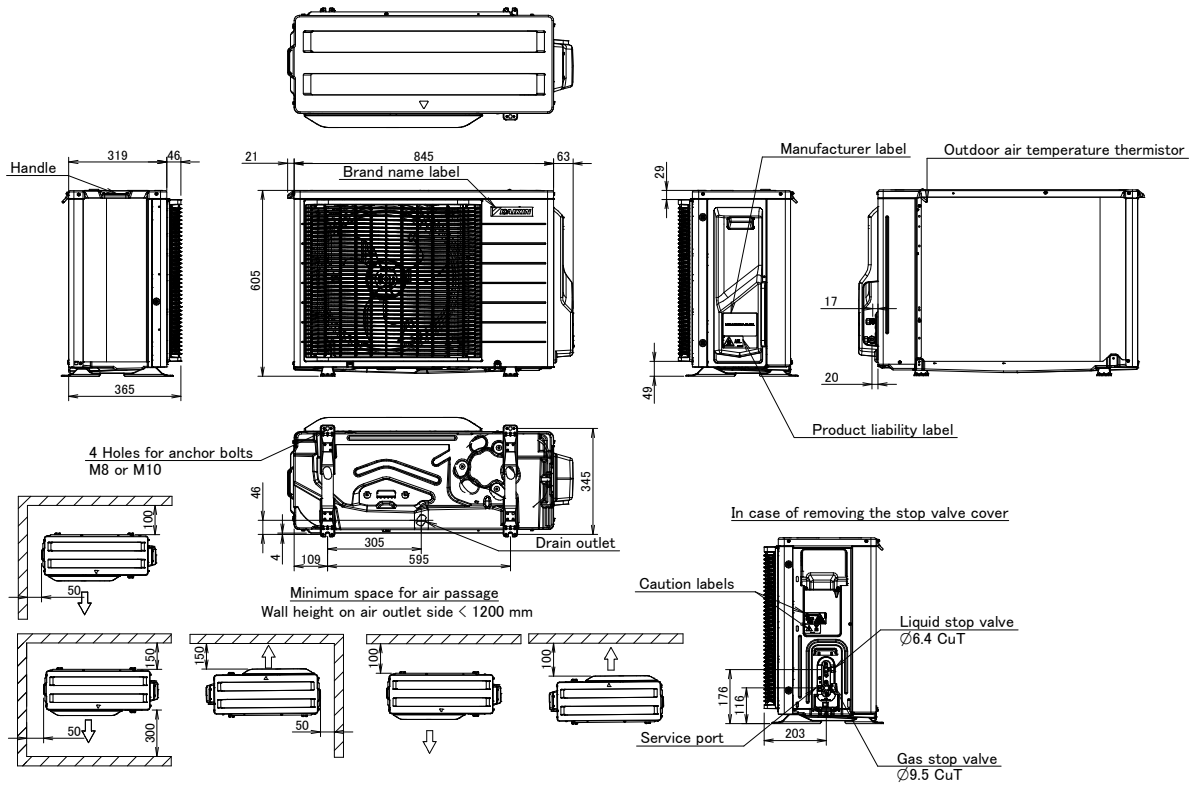


3D147537

# 6 Centre of gravity

## 6 - 1 Centre of Gravity

6


RXTA-C

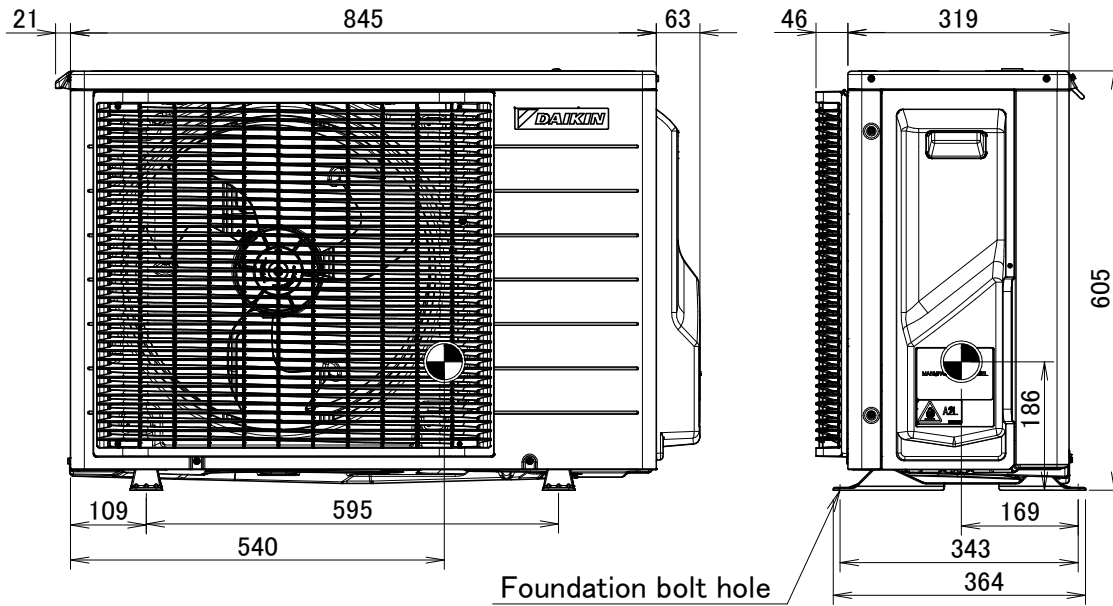

4D147582

# 7 Piping diagrams

## 7 - 1 Piping Diagrams


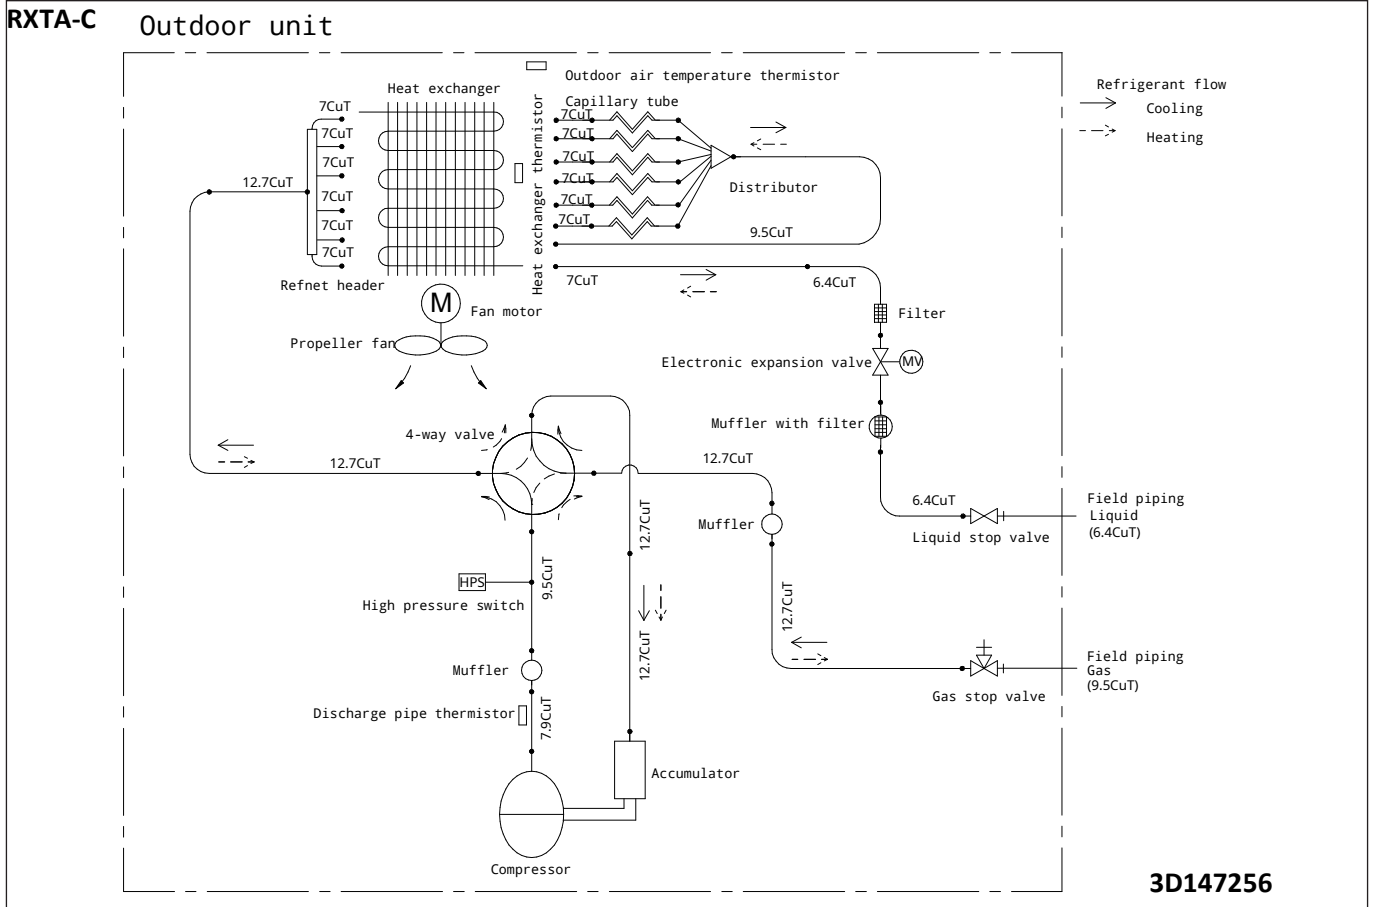




# 9 Sound data

## 9 - 1 Sound Power Spectrum

RXTA-C

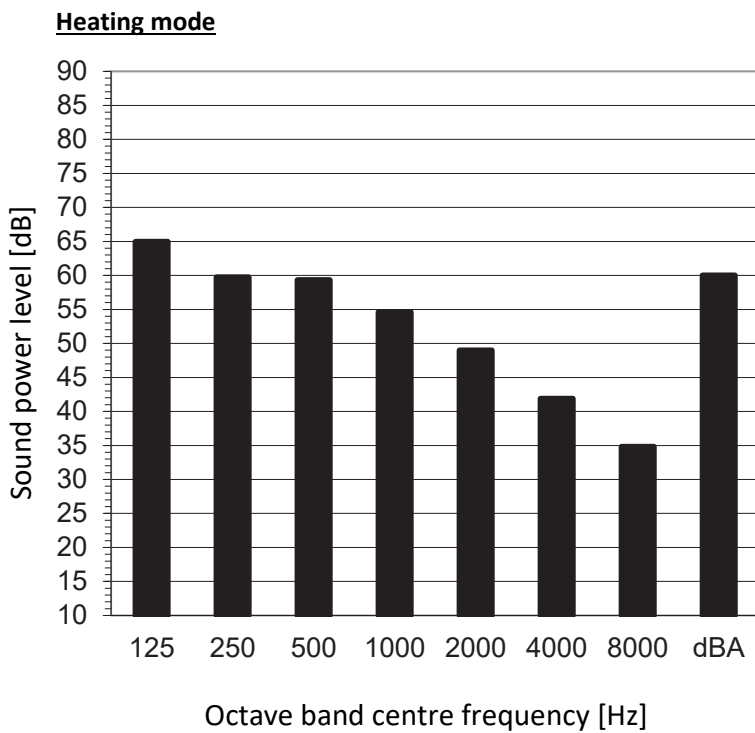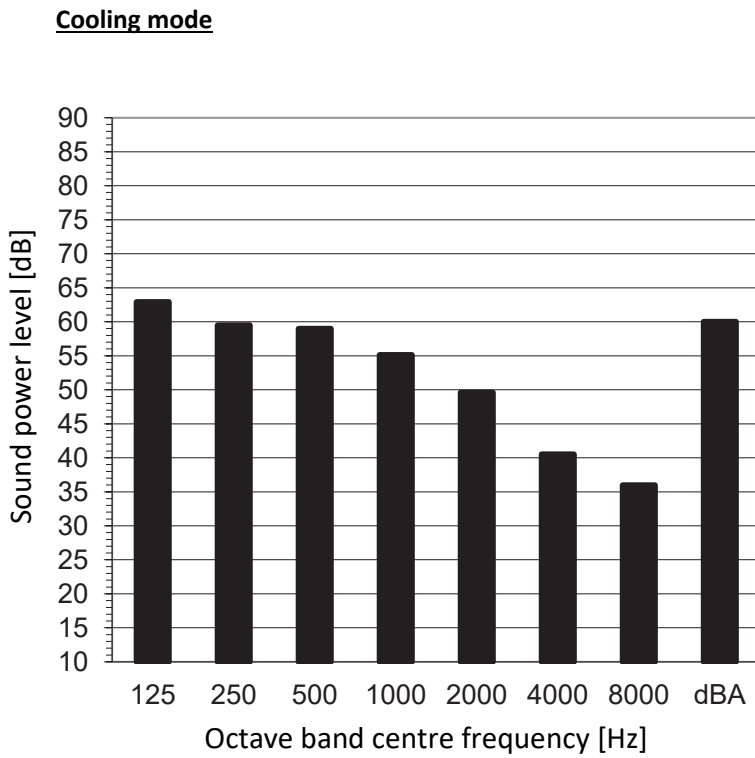

■ Fan speed: High

**Notes**

1. dBA = A-weighted sound power level (A scale according to IEC).
2. Reference acoustic power 0 dB =  $\cdot 10^{-12}$  W/m<sup>2</sup>.
3. Measured according to ISO 3744



**4D147893**

# 9 Sound data

## 9 - 2 Sound Pressure Spectrum

9

RXTA-C

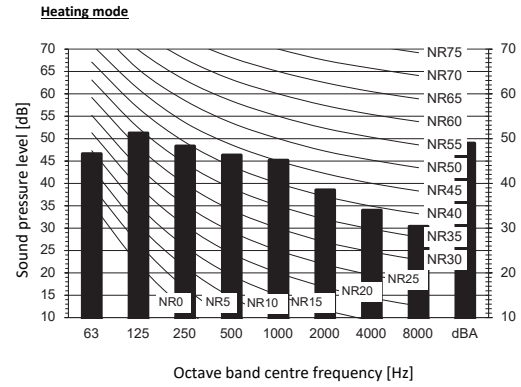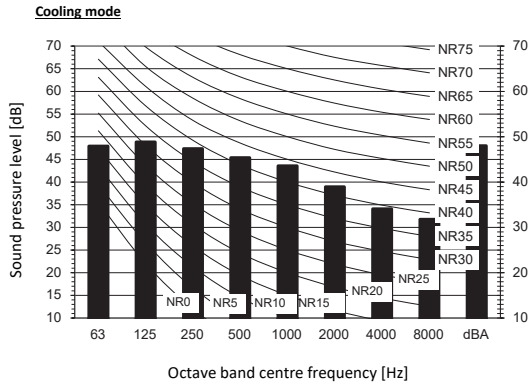

Cooling  
Total dB

A	B
dBA	48

Heating  
Total dB

A	B
dBA	49


**Legend**

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

Location of microphone




**Notes**

1. Operating conditions: power source 220-240 V 50 Hz; JIS standard
2. Background noise already taken into account.
3. Operating noise varies depending on operation and ambient conditions.
4. The operation noise measuring method is in accordance with JISC9612.
5. Measuring location: anechoic chamber

4D147892


# 10 Operation range

## 10 - 1 Operation Range

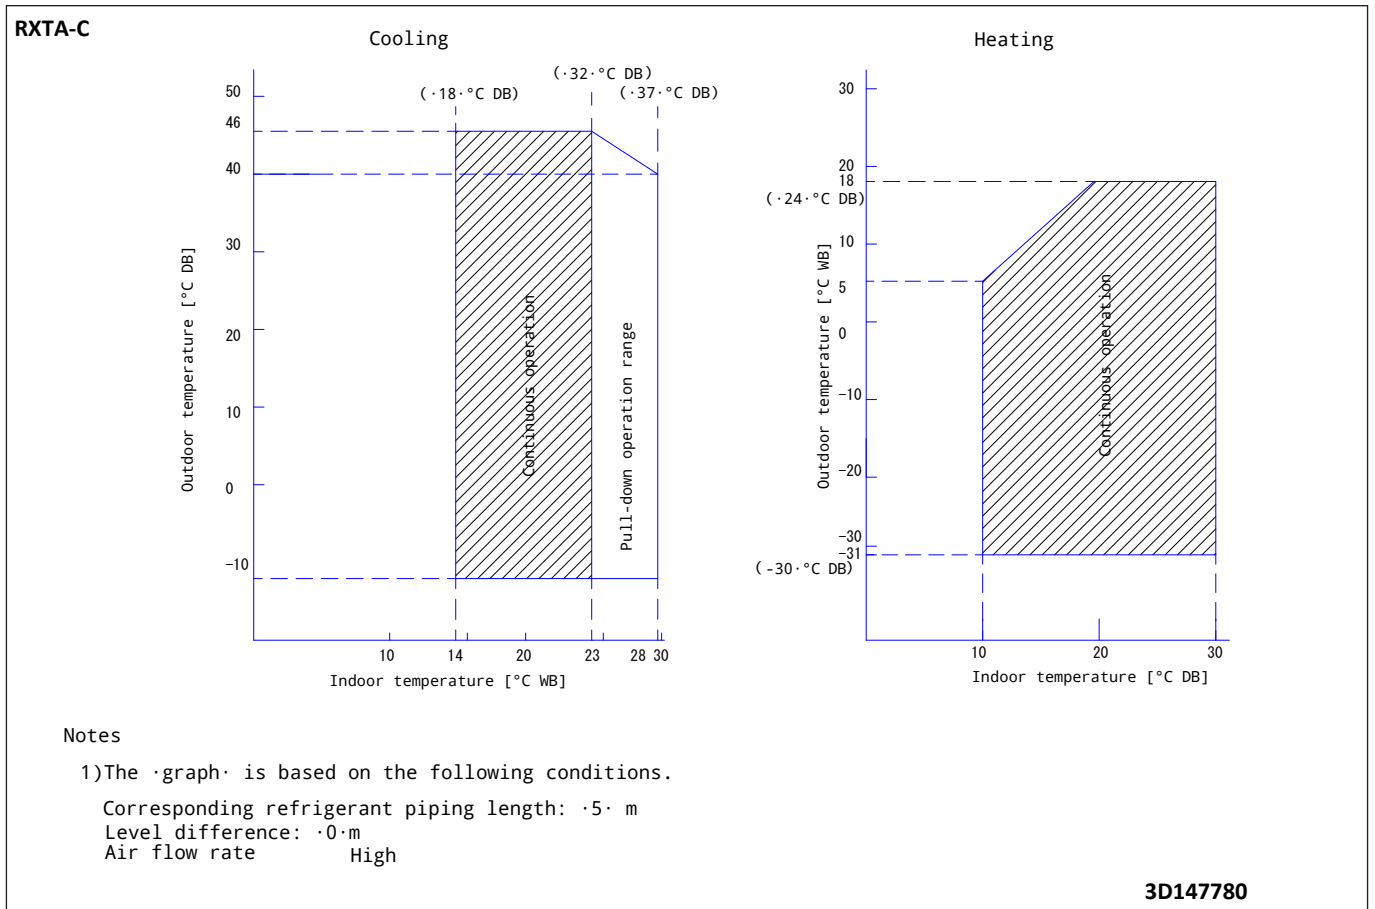

---

**Daikin Europe N.V.** Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · [www.daikin.eu](http://www.daikin.eu) · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)

EEEN26

02/2026



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.